

YARCK Locks reserves the right to change the design and specifications that time without notice,all the information has been carefully checked,for accuracy,and if there is any typographical errors or omissions or in the production of the errors that may arise,the companise do not bear the consequences resulting,the printing process may result in the product information with a slight difference in kind ,select the product to prevail in kind.

CHIHIO 智合创森 注册/商标 VI 小组 13819770896

Yarck[®]
HEA VY DUTY

Door hardware catalog

20
25



Yarck[®]
HEA VY DUTY

AESTHETIC
ART ENJOY
THE TIME

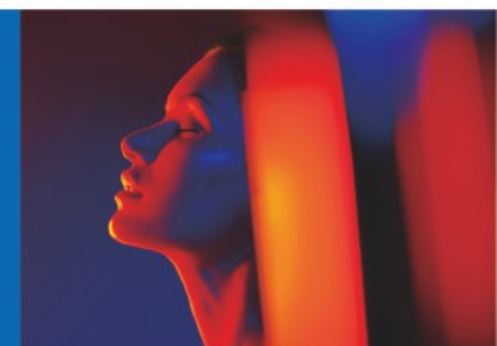




TABLE OF CONTENTS

Page.01-08 FURNITURE HANDLE SERIES

Page.09-22 SMART LOCK SERIES

Page.23-44 DOOR LOCK SERIES

Page.45-46 ELETRIC LOCK AND HOTEL LOCK

Page.47-54 PULL HANDLE SERIES

Page.55-58 LOCK BODY SERIES

Page.59-66 DOOR HINGES SERIES

Page.67-68 DOOR CYLINDER

Page.69-72 CLOSER AND PUSH BAR


Page.73-76 SMALL HARDWARE



10005

Material : Zinc alloy
COLOR : MSN, BB, BLACK


C	L	H	W
128	138	23	12
160	170	23	12
192	202	23	12
320	330	23	12



B3001

Material : Aluminum alloy
COLOR : BLACK

C	L	H	W
96	105	23	12
128	137	23	12
160	168	23	12
192	200	23	12




FURNITURE HANDLE SERIES



YK1003

Material : Zinc alloy
COLOR : MSN, BB, BLACK


C	L	H	W
128	157	30	21
192	221	30	21




YK1001

Material : Zinc alloy
COLOR : MSN, BB, BLACK, WHITE

C	L	H	W
128	142	31	7
192	207	31	7
320	336	31	7



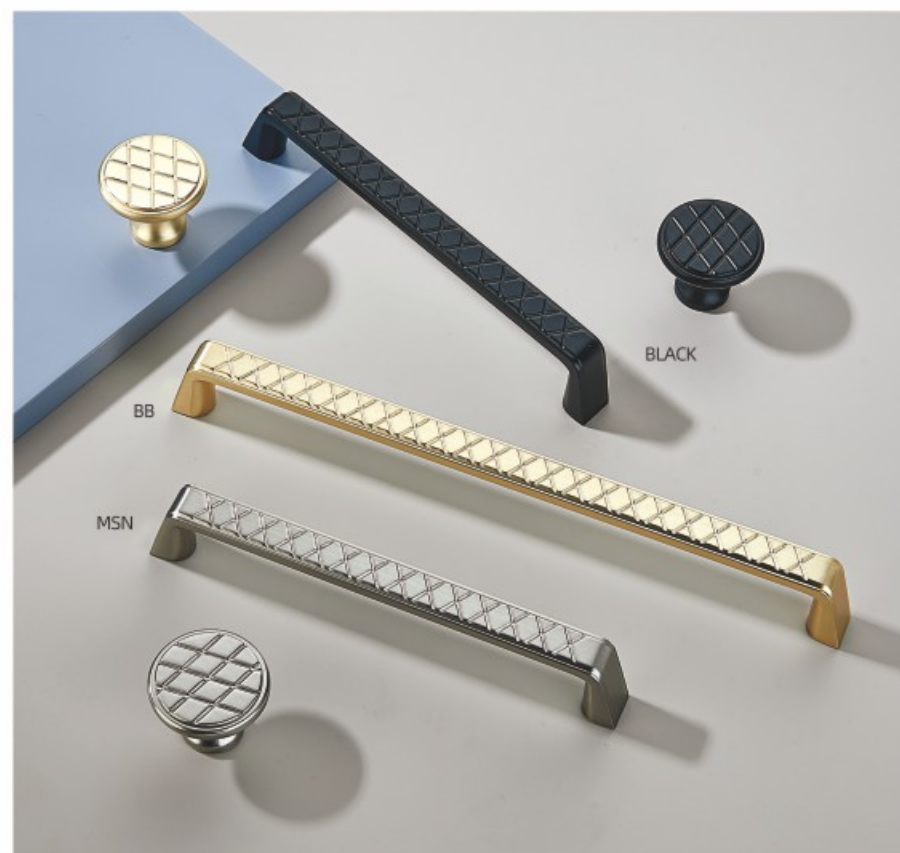

YK1002

Material : Zinc alloy
COLOR : MSN, BB, BLACK


	C	L	H	W
K		32	25	32
128		137	25	12
192		201	25	12



YK1005

Material : Zinc alloy
COLOR : BB, BLACK

	C	L	H	W
128		147	25	15
192		210	25	15
320		340	25	15





FURNITURE HANDLE SERIES



10099

Material : Aluminum alloy
COLOR : MSN, BB, BLACK


	C	L	H	W
128		140	31	13
160		172	31	13
192		202	31	13

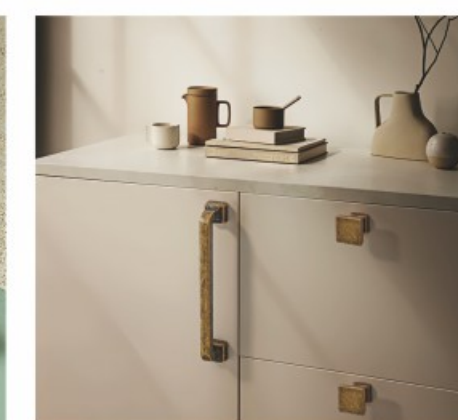


YK1007

Material : Zinc alloy
COLOR : MSN, BB, BLACK, BAB, AN

	C	L	H	W
K		28	29	28
128		147	31	20
192		210	31	20




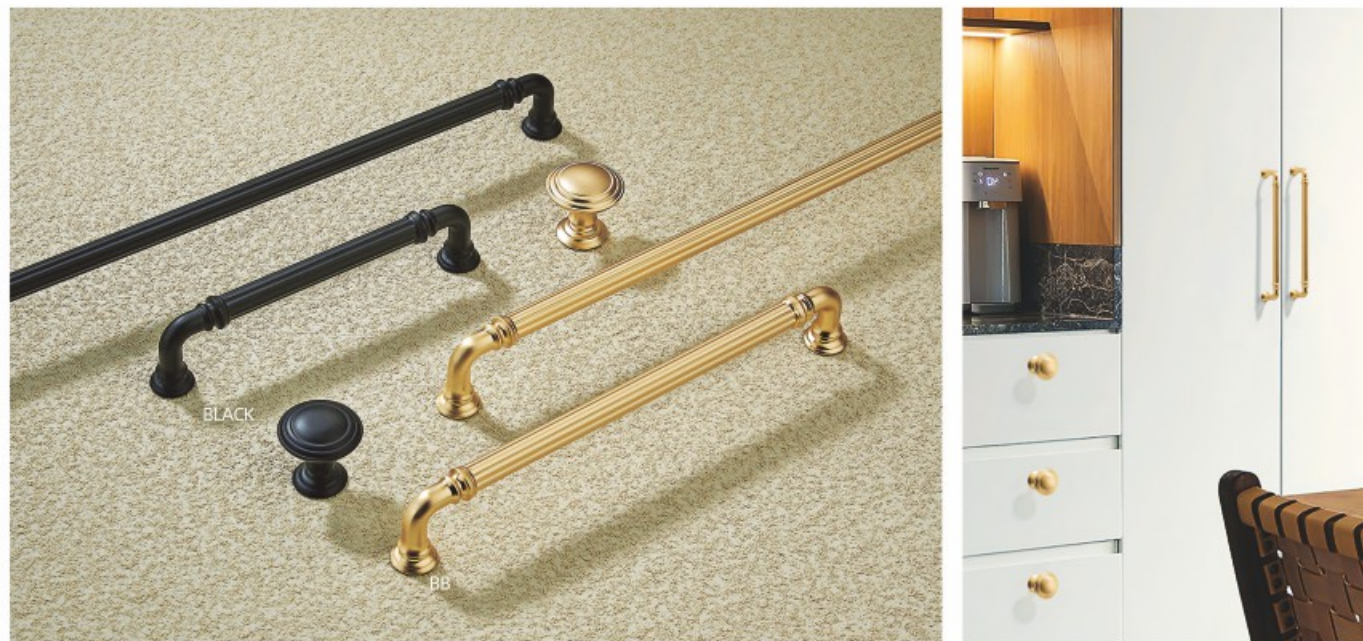

YK1004

Material : Zinc alloy
COLOR : BB , BLACK


C	L	H	W
K	30	28	30
128	144	32	16
192	208	32	16
320	336	32	16



30052

Material : Aluminum alloy
COLOR : KGP+BLACK , KGP+MATT GOLD

C	L	H	W
K	50	32	17
96	147	32	17
128	178	32	17
160	210	32	17
224	274	32	17




FURNITURE HANDLE SERIES



30015

Material : Aluminum alloy
COLOR : BLACK, GOLD


C	L	H	W
128	152	34	6
160	183	34	6
224	247	34	6



30042

Material : Aluminum alloy
COLOR : BLACK, GOLD


C	L	H	W
128	182	34	13
160	214	34	13
192	246	34	13



30001

Material: Aluminum alloy
COLOR : BLACK, GOLD, SILVER


C	L	H	W
128	147	26	10
160	178	26	10
192	210	26	10
320	338	26	10




30053

Material: Aluminum alloy
COLOR : BLACK

C	L	H	W
224	250	18	40
320	350	18	40




FURNITURE HANDLE SERIES

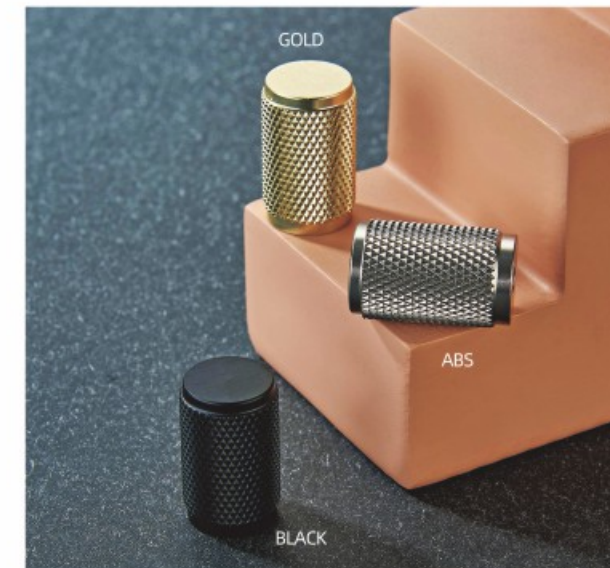

50104

Material: Aluminum alloy
COLOR : BLACK, GOLD, ABS


C	L	H	W
K	17	30	17

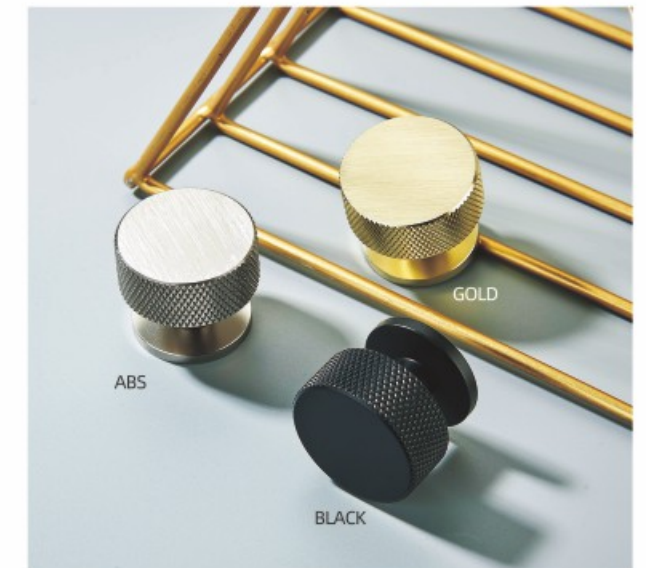

50107

Material: Aluminum alloy
COLOR : BLACK, GOLD, ABS

C	L	H	W
K	30	27	30

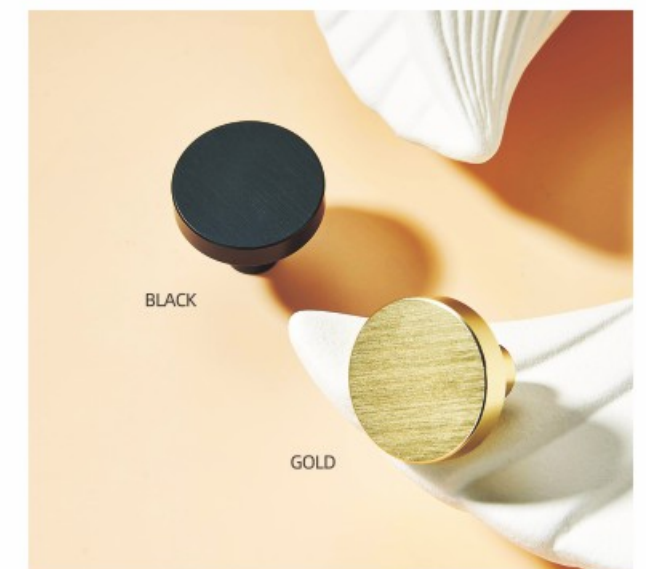

B5001

Material: Aluminum alloy
COLOR : BLACK

C	L	H	W
K	30	25	30




50188

Material: Aluminum alloy
COLOR : BLACK, GOLD

C	L	H	W
K	30	25	30




3D FACIAL RECOGNITION SMART LOCK

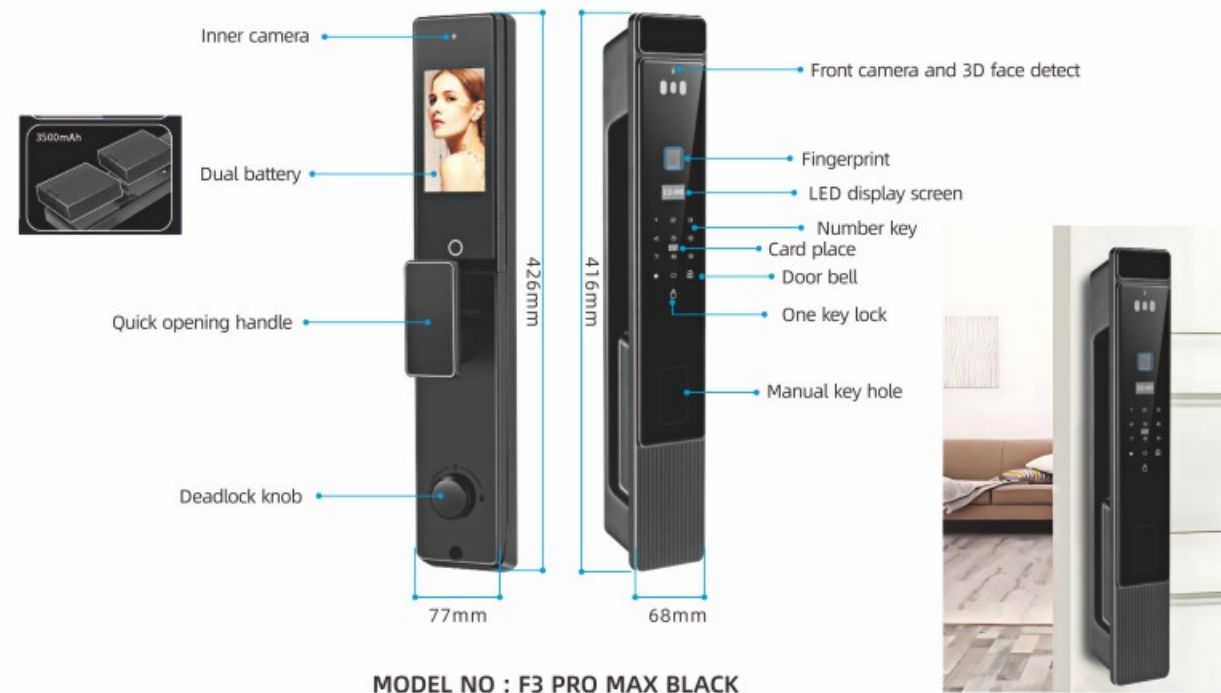


Technical Parameter:

Material :	Aluminum
Batteries :	2 pcs *3500 MAH Lithium Lon Batteries
Power Supply :	5V (Rechargeable battery)
Typical Quiescent:	< 55 mA (Battery charge one time can use 5 month)
Working Current:	< 250 Ma (strong driving capability)
No of Fingerprint:	≥100
No of Cards:	≥100 (2 pcs free)
No of password:	≥100
Munual key:	2
Resolution:	500 DPI
Error Identification rate :	≤0.0004%
Operating Temperature :	-30°C ~ 60°C
Relative Humidity:	-20% ~ 93%

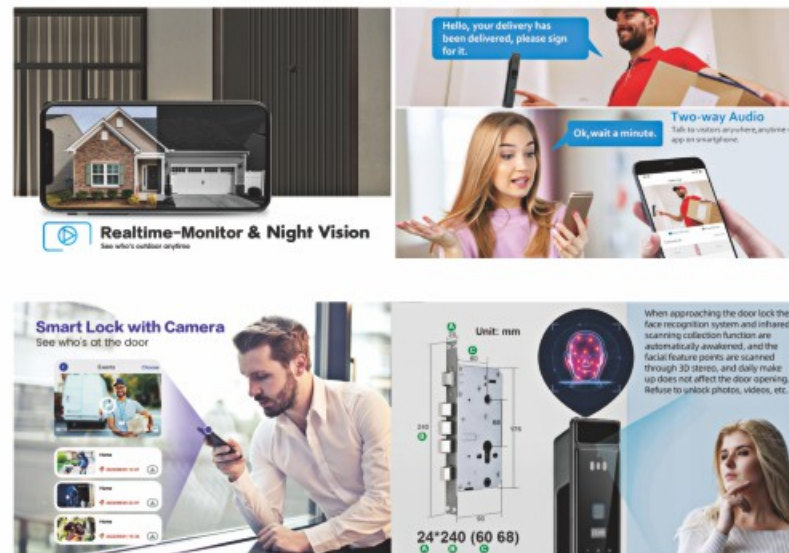


SMART LOCK SERIES

3D FACIAL RECOGNITION SMART LOCK

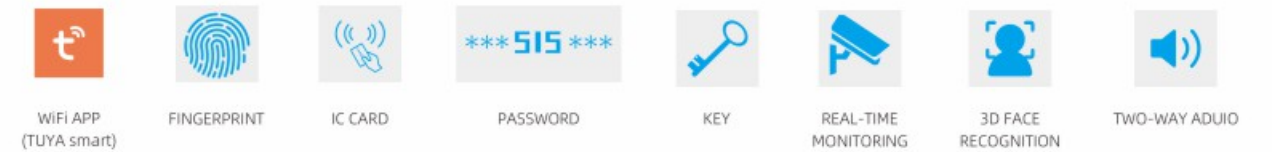

Technical Parameter:

Material :	Aluminum
Batteries :	2 pcs *3500 MAH Lithium Lon Batteries
Power Supply :	5V (Rechargeable battery)
Typical Quiescent:	< 55 mA (Battery charge one time can use 5 month)
Working Current:	< 250 Ma (strong driving capability)
No of Fingerprint:	≥100
No of Cards:	≥100 (2 pcs free)
No of password:	≥100
Munual key:	2
Resolution:	500 DPI
Error Identification rate :	≤0.0004%
Operating Temperature :	-30°C ~ 60°C
Relative Humidity:	-20% ~ 93%

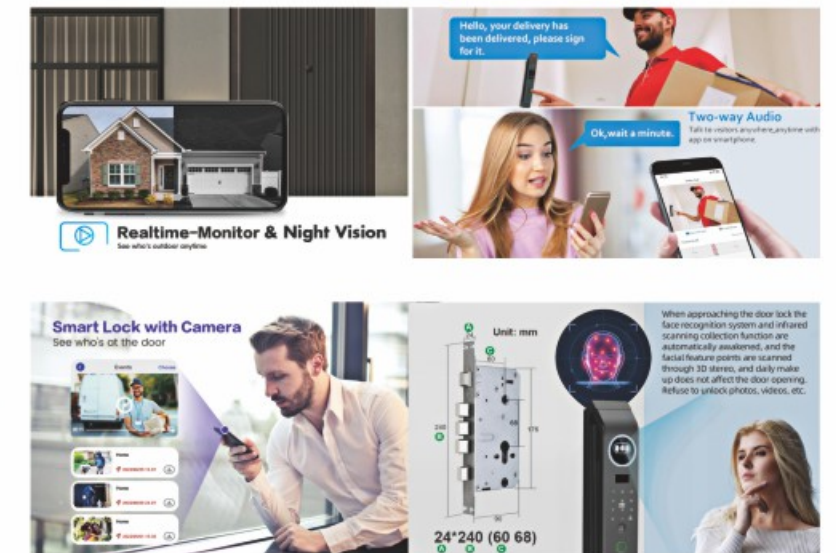



Convenient

SMART LOCK SERIES

yarck®
HEA VY DUTY

SMART LOCK



MODEL NO: Q7-2 BLK



WiFi APP (TUYA smart)



FINGERPRINT



CARD



PASSWORD




KEY

Technical Parameter:

Power Supply :	5V (Rechargeable battery)
Typical Quiescent:	< 55 mA (Battery charge one time can use 5 month)
Working Current:	< 250 Ma (strong driving capability)
No of Fingerprint:	≥100
No of Cards:	≥100 (2 pcs free)
No of password:	≥100
Munual key:	2
Resolution:	500 DPI
Error Identification rate :	≤0.0004%
Operating Temperature :	-30°C ~ 60°C
Relative Humidity:	-20% ~ 93%

Lock body size



MODEL NO: 68003

3D SMART FACE RECOGNITION LOCK




MODEL NO: NXV 3D



Technical Parameter:

Power Supply :	5V (Rechargeable battery)
Typical Quiescent:	< 55 mA (Battery charge one time can use 5 month)
Working Current:	< 250 Ma (strong driving capability)
No of Fingerprint:	≥100
No of Cards:	≥100 (2 pcs free)
No of password:	≥100
Manual key:	2
Resolution:	500 DPI
Error Identification rate :	≤0.0004%
Operating Temperature :	-30°C ~ 60°C
Relative Humidity:	-20% ~ 93%

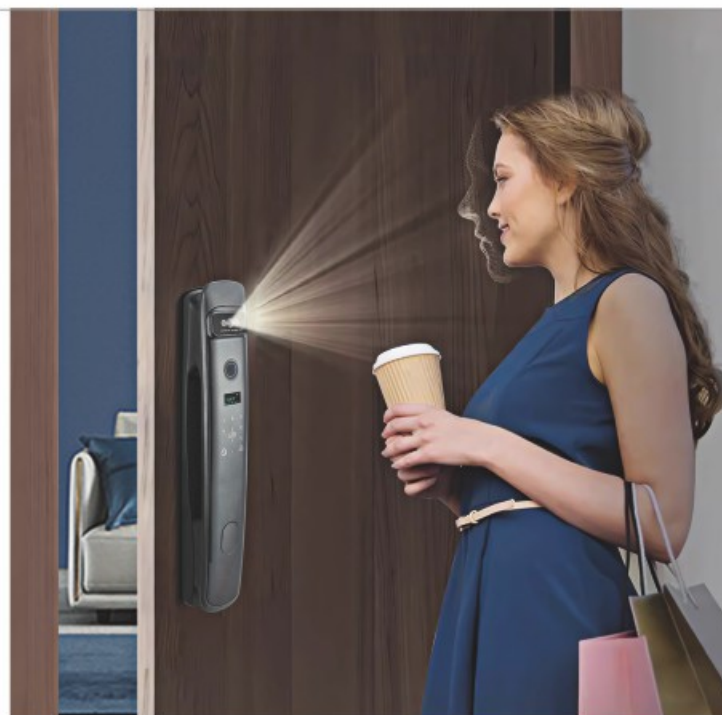

SMART LOCK SERIES

SMART LOCK



MODEL NO: H3 BLACK



Technical Parameter:

Power Supply :	5V (Rechargeable battery)
Typical Quiescent:	< 55 mA (Battery charge one time can use 5 month)
Working Current:	< 250 Ma (strong driving capability)
No of Fingerprint:	≥100
No of Cards:	≥100 (2 pcs free)
No of password:	≥100
Manual key:	2
Resolution:	500 DPI
Error Identification rate :	≤0.0004%
Operating Temperature :	-30°C ~ 60°C
Relative Humidity:	-20% ~ 93%




MODEL NO: H3 GP

Technical Parameter:

Product material:	Zinc alloy
Mechanical lock cylinder:	C-class key lock cylinder
Door opening direction:	Common to left and right inside and outside
Power type:	4 AAA alkaline batteries
Password length:	24 digits
Number of cipher suites :	Infinite loop
Emergency power supply:	USB power supply
Applicable door thickness:	35-66mm
Operating Temperature :	-30°C ~ 60°C
Relative Humidity:	-20% ~ 93%
Applicable door type:	Bedroom Office Hotel Rental house interior door
Product size:	250mm x 60mm x 21mm
Door opening method:	Fingerprint Password Card Key
Bluetooth APP Remote control (optional) Gateway (ptional)	



Control the unlocking record at all times
You can remotely view the switch lock history through the mobile APP

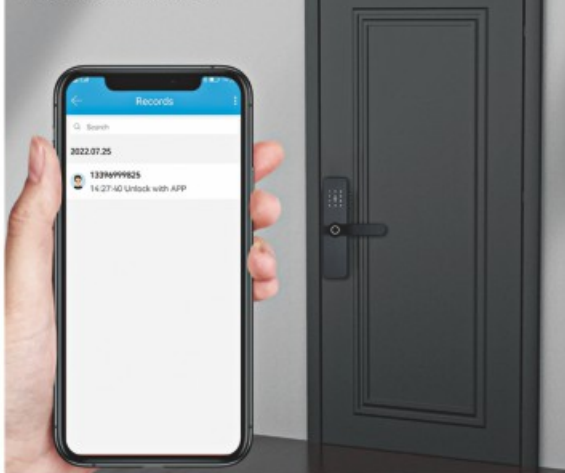



MODEL NO: F80 BLACK



MODEL NO: F80 MSN





MODEL NO: F80 PVD

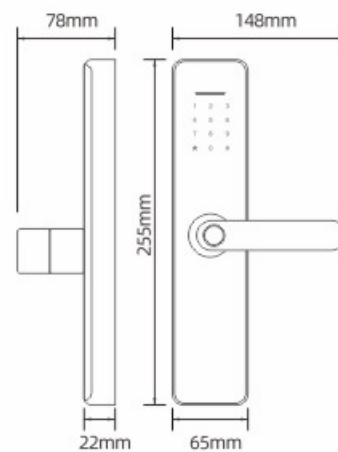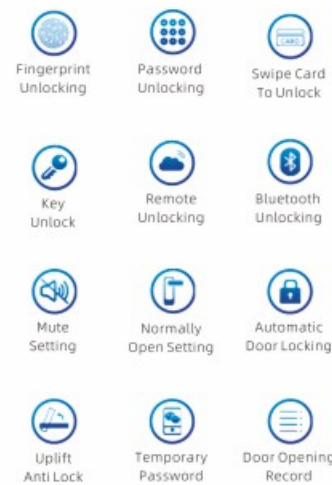

SMART LOCK SERIES

SMART ON ROSE LOCK STANDARD ITALY AND GEMERNY SIZE (EASY TO DIY REPLACE)

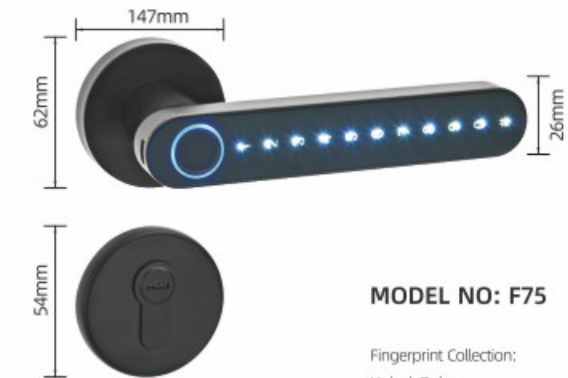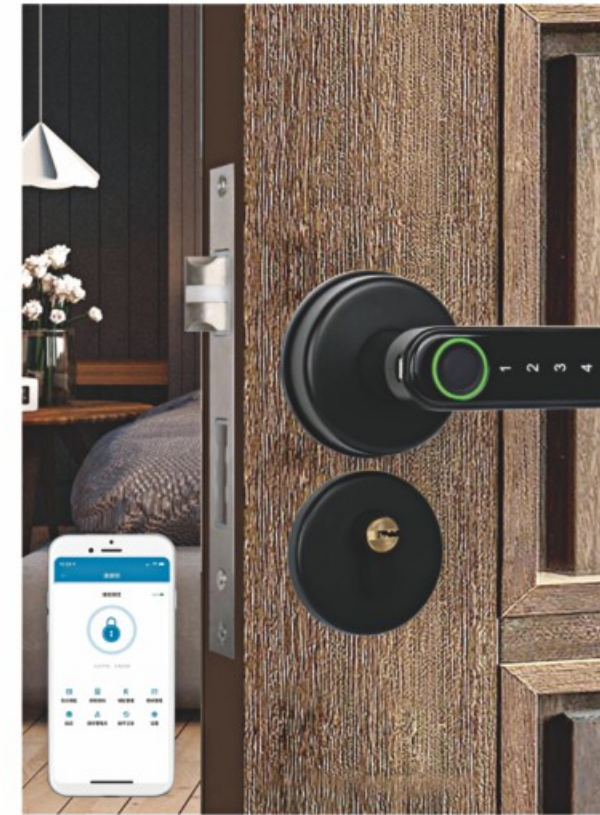

MODEL NO: F75

Fingerprint Collection:	Semiconductor
Unlock Delay:	5S
Low Voltage Alarm:	≤4.8VDC
Working Voltage:	6VDC (4 Pcs AAA Batteries)
Fingerprint Capacity:	120 Sets
Password Capacity:	120 Sets
Operating Temperature :	-30°C ~ 60°C
Relative Humidity:	-20% ~ 93%
Applicable door thickness:	35 ~ 65 MM
Bluetooth App	
(Option wifi remote control with gateway)	



BLUETOOTH APP TT LOCK



FINGERPRINT



CARD



PASSWORD



KEY



GATE WAY Gateway G2[®]



GATEWAY G2

WIFI/ BLUETOOTH

Model:	G2	Remote view Fingerprint unlock / Password unlock / Card unlock records
Dimensions:	70*70*26 MM	Remote unlock by connected gateway
Network:	WIFI 2.4G	Remote add/delete user Password/card/fingerprint management
IEEE Standard:	802.11 b/g/n	
Power Interface:	Type-C USB	
Power Input:	DC 5V/500mA	

The gateway can be paired within 60 seconds when it is powered on.



MODEL NO: FP09 BLK



Technical Parameter:

Power Supply :	5V (Rechargeable battery)
Typical Quiescent:	< 55 mA (Battery charge one time can use 5 month)
Working Current:	< 250 Ma (strong driving capability)
No of Fingerprint:	≥100
No of Cards:	≥100 (2 pcs free)
No of password:	≥100
Munual key:	2
Resolution:	500 DPI
Error Identification rate :	≤0.0004%
Operating Temperature :	-30°C ~ 60°C
Relative Humidity:	-20% ~ 93%



MODEL NO: FP09 GP

MINI FINGERPRINT SMART CABINET DRAWER LOCK

MODEL NO : F040 BLACK



Technical Parameter:

Material

ABS+PC

Working Current:

Load current<160mA@4.5V
Standby current <20mA @ 45V
Static current <30uA @4.5V

Working voltage:

DC4.5V(3*AAA 1.5V 7#Alkaline battery33V-4.5W)
USB working voltage : 3.3V-53V
Under normal circumstances can be standby for more than 24 months
Low voltage: 3.6V±0.1V


Working Current:

Working temperature -20C ~+65C
Working humidity 10% ~ 90RH





Fingerprint:

Manager Fingerprint :2
Normal User Fingerprint :48

SMART LOCK SERIES

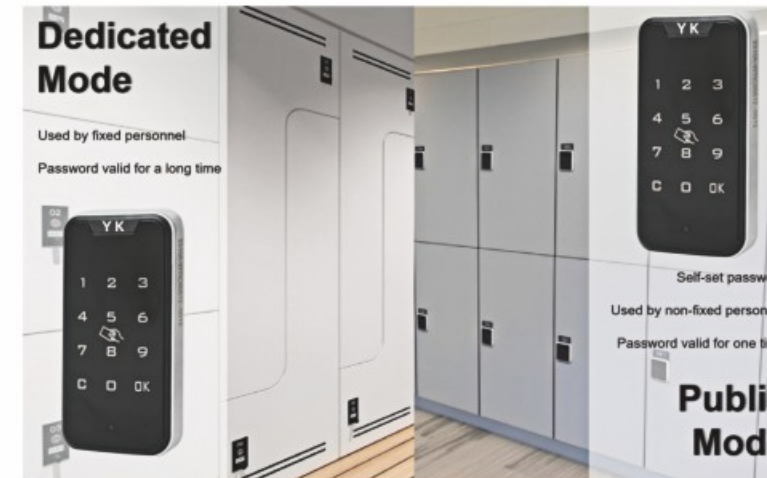

ELETRONIC CABINET LOCK
MODEL NO :K990 BLK

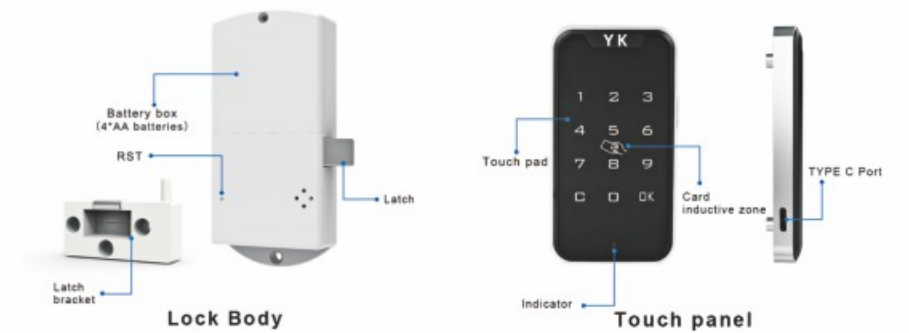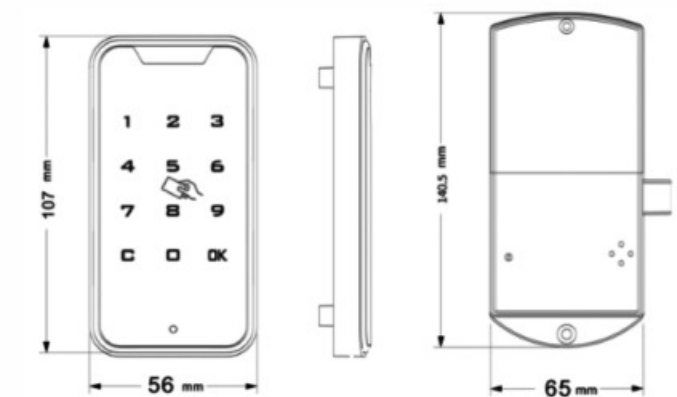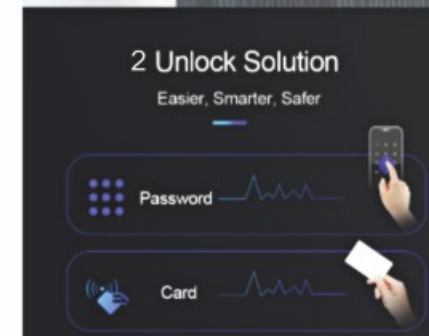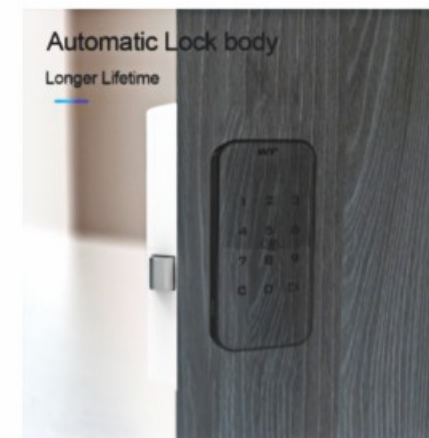

Application Scenarios



Technical Parameter:

Card Read Distance :	5-10 mm
Management password:	1 group (default 1234)
User password:	1 group (default 1234)
Working temperature:	(-25 to +55 °C)
Working Humidity:	10% to 85% RH
Management Card:	Maximum 3
Guest card:	Maximum 27
Static Current:	≤30uA
Dynamic Current :	≤120mA
Power Supply :	4x AA batteries

CLASS DOOR INTELLIGENT LOCK



MODEL NO : F898



REMOVE CONTROL
(MAX : 20 METER)



FINGERPRINT



CARD



PASSWORD



KEY


Technical Parameter:

Power Supply :	4.5V-6.5V (i.e 4 No 5 dry cells)
Typical Quiescent:	< 50 mA (Battery life can exceed one year)
Working Current:	< 200 Ma (Strong driving capability)
No of Fingerprint:	<=300
No of Cards:	<=300
No of password:	<=300
Manual key:	2
Resolution:	500 DPI
Rejection Rate	≤0.15%
Error Identification rate :	≤0.0004%
Operating Temperature :	-30°C ~ 60°C
Relative Humidity:	-20% ~ 93%

ALUMINIUM AND STEEL DOOR INTELLIGENT LOCKS



MODEL NO : S910 MBN

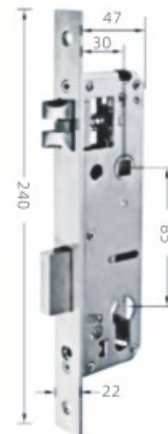

Technical Parameter:

Power Supply :	4.5V-6.5V (i.e 4 No 7 dry cells)
Typical Quiescent:	< 55 mA (Battery life can exceed one year)
Working Current:	< 250 Ma (strong driving capability)
No of Fingerprint:	<=100
No of Cards:	<=100
No of password:	<=100
Manual key:	2
Resolution:	500 DPI
Rejection Rate	≤0.15%
Error Identification rate :	≤0.0004%
Operating Temperature :	-30°C ~ 60°C
Relative Humidity:	-20% ~ 93%



FINGERPRINT



CARD



PASSWORD



KEY

SMART LOCK SERIES

Technical Parameter:

Power Supply :	4.5V-6.5V(3 PCS NO 5 DRY CELLS)
Typical Quiescent:	< 20 mA (Battery life can exceed one year)
Working Current:	< 200 Ma (Strong driving capability)
No of Cards:	Master key 3 and Normal User card 120
No of password:	A: one-time code (function switch in position 2 and left side) B: Permanent Code (function switch in position 1 and right side)
Operating Temperature :	-15°C ~ +55°C
Relative Humidity:	-20% ~ 93%




ELECTRONIC CABINET LOCK



Model No: K880
(open by card or password)

External Charger Option

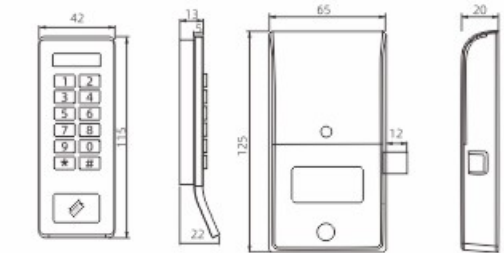

MODEL NO : CABINET LOCKER DL240A




Technical Parameter:

digit code ensure more security
User friendly and easy to install
Master key available

SMART LOCK CYLINDER


MODEL NO : F62 SILVER

(NOTE: WITH WATER PROOF RUBBER COVER)

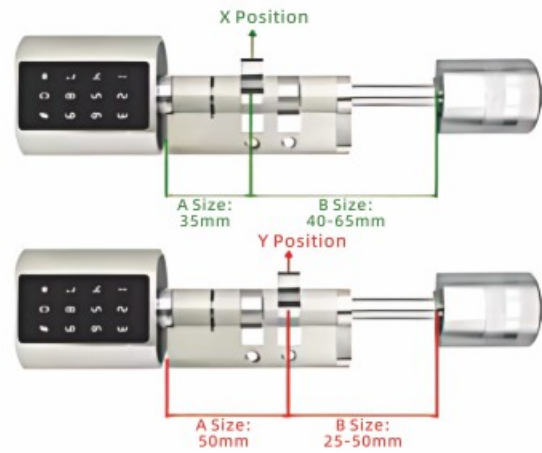

Your Smart Housekeeper
Always keep your safety

TTLOCK VERSION

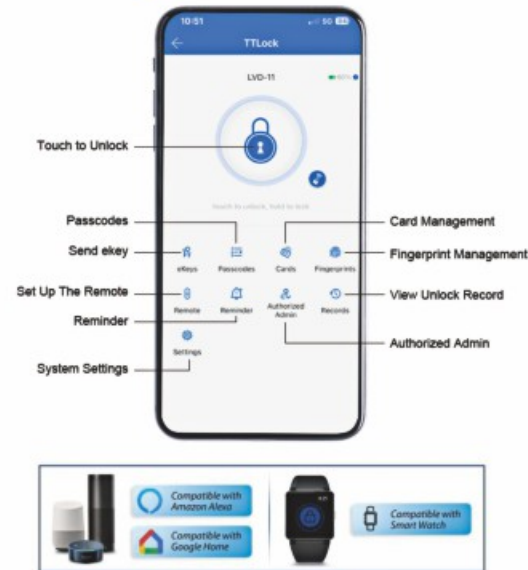


SMART LOCK SERIES

MODEL NO : F73 BLK



Your Smart Housekeeper
Always keep your safety

TTLOCK VERSION

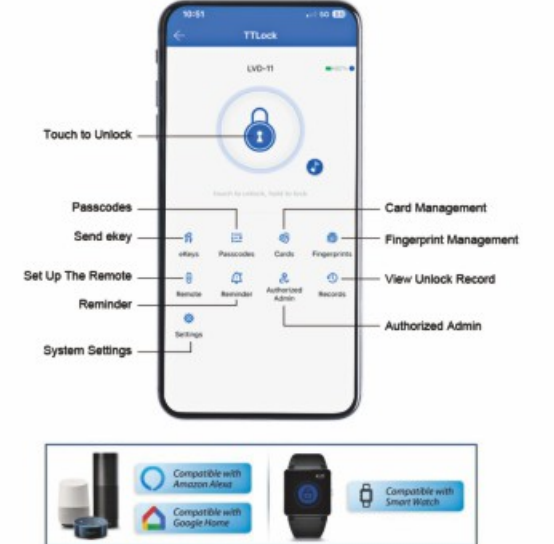

UNLOCKING FUNCTION:

Fingerprint, password, card, key
App temporary password for remote unlock

WIFI OPTION (ADD SMART LOCK GATEWAY)

Product Parameter :

Main material :	Highdensity aluminium alloy
Color:	Silver
Emergency power supply:	External usb port
Emergency manual key:	2 pcs
Card:	2 pcs
Capacity user:	100 person
Adaptive app :	TT lock
Suitable door thickness:	35-70mm
Applicable category:	Wooden doors,metal doors
Operating temperature:	-30°C ~ 60°C
Relative humidity:	-20% ~ 93%

GATE WAY Gateway G2®



- Remote view Fingerprint unlock / Password unlock / Card unlock records
- Remote unlock by connected gateway
- Remote add/delete user
- Password/card/fingerprint management


WIFI/ BLUETOOTH

Model:	G2
Dimensions:	70*70*26 MM
Network:	WiFi 2.4G
IEEE Standard:	802.11 b/g/n
Power Interface:	Type-C USB
Power Input:	DC 5V/500mA

The gateway can be paired within 60 secondswhen it is powered on.

Product Parameter :

Main material :	Highdensity aluminium alloy
Color:	Black
Emergency power supply:	External usb port
Emergency manual key:	2 pcs
Card:	2 pcs
Capacity user:	100 person
Fingerprint head:	Semiconductor
Adaptive app :	TT lock
Suitable door thickness:	35-70mm
Applicable category:	Wooden doors,metal doors
Operating temperature:	-30°C ~ 60°C
Relative humidity:	-20% ~ 93%

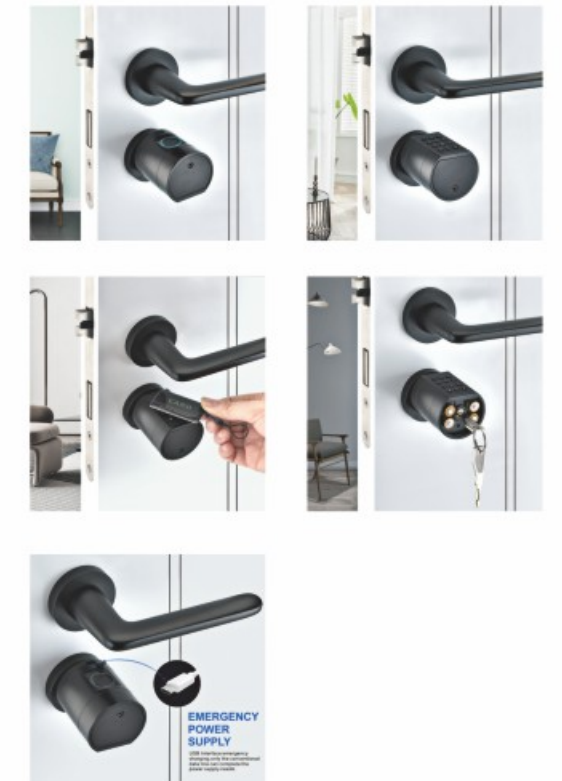




DOOR LOCK SERIES

yarck®
HEA VY DUTY



9803L-03 AD

Total depth 89mm

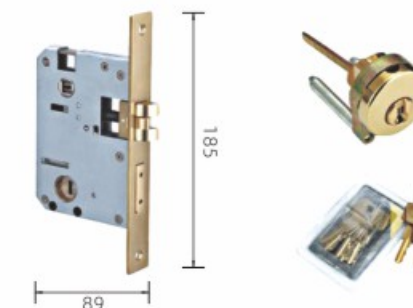


9803 LOCKBODY AND CYLINDER




SP-KE21

KE21

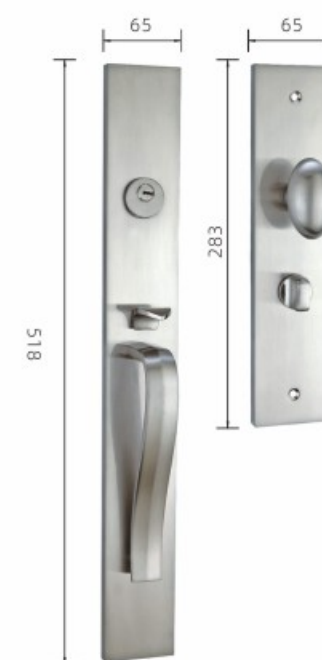

9809L-06 SN/CP

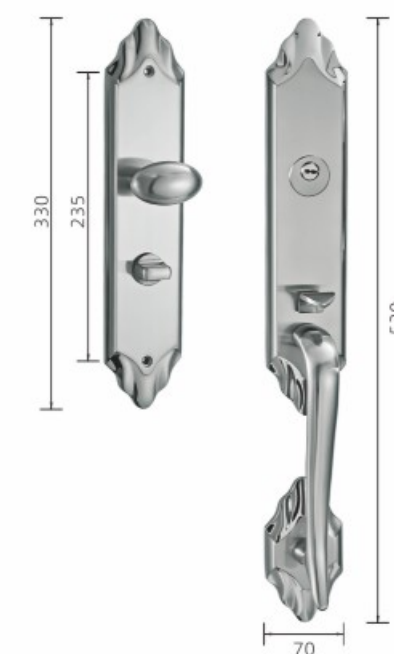

F9809M SN/CP


STANDARD CHINA SECURITY DOOR LOCK



6804 SS




6802 AC

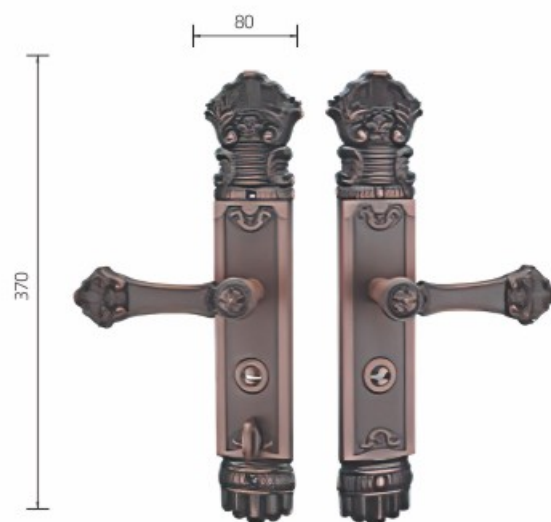


F98075-H17 MAC



68003



LUXURY MAIN DOOR LOCK (ITALY STANDARD)

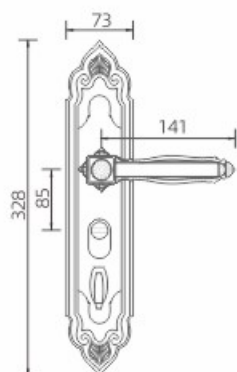

DD29-AA34 GP
ZINC PLATE+ZINC HANDLE



DD29-AA34 AC
ZINC PLATE+ZINC HANDLE



DD29-AA34 MAB
ZINC PLATE+ZINC HANDLE



DD29-AA34 MAE
ZINC PLATE+ZINC HANDLE

DOOR LOCK SERIES




AA626-AA732 MSN



AA626-AA732 DAB



AA626-AA732 MSB

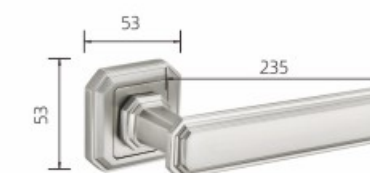

Z10-AA732 MSN



Z10-AA732 PVD



Z10-AA732 DAB



Z10-AA732 BLK





AA615-AA320 SN/RGP
FULL ZINC MATERIAL



AA615-AA320 MSN/CP
FULL ZINC MATERIAL



AA615-AA320 SG/GP



AA619-AA45 MSN/CP



AA620-AA46 BLK/RGP



AA620-AA46 MSN/TGP



AA620-AA46 MSN



AA620-AA46 MAB



AA615-AA403 BLK
ZINC PLATE+ALU HANDLE



AA615-AA708 BLK
FULL ZINC MATERIAL




AA621-AA311 SG/GP



AA621-AA311 MAE

DOOR LOCK SERIES

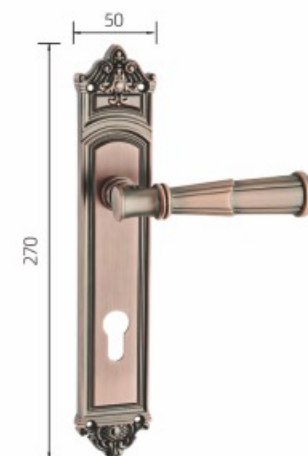

AA314-AA315 MAC
FULL ZINC MATERIAL



AA314-AA315 MAB
BLACK AVAILABLE



AA314-AA315 GP
FULL ZINC MATERIAL



AA314-AA315 MAE
FULL ZINC MATERIAL



AA314-AA315 BLK
FULL ZINC MATERIAL



AA615-AA330 MSN
FULL ZINC MATERIAL



AA615-AA330 MAE
FULL ZINC MATERIAL



AA615-AA330 MAB
FULL ZINC MATERIAL



AA315-AA323 MSN
FULL ZINC MATERIAL



AA315-AA323 MAB
FULL ZINC MATERIAL



AA615-AA720 MSN



AA201-AA202 WHITE



AA301-AA302 MAB
FULL ZINC MATERIAL



AA301-AA302 MAE
FULL ZINC MATERIAL



AA41-AA19 MAE
FULL ZINC MATERIAL



AA41-AA19 MAC
FULL ZINC MATERIAL



AA213-AA214 WGP
FULL ZINC MATERIAL



AA213-AA214 GP
FULL ZINC MATERIAL



AA213-AA214 MAC
FULL ZINC MATERIAL



AA213-AA214 MAE
FULL ZINC MATERIAL



AA102-AA23 SN/CP



AA102-AA23 GP



AA106-AA23 SN/CP
FULL ZINC MATERIAL



AA102/903 SN/CP
AVAILABLE GP COLOR

DOOR LOCK SERIES



AA102-AA65 SN/CP
FULL ZINC MATERIAL



Z614-AA43 SN /CP
FULL ZINC MATERIAL



AA617-AA406 BLACK/PB



AA617-AA406 MSN/CP



AA615-AA416 MSN
FULL ZINC MATERIAL



AA615-AA416 BLK
ZINC PLATE+ALUMINIUM HANDLE



AA615-AA416 MBN
FULL ZINC MATERIAL



AA615-AA416 MSB
ZINC PLATE+ALUMINIUM HANDLE



AA615-AA416 MAE
FULL ZINC MATERIAL



AA614-AA409 MAB
ZINC PLATE+ALUMINIUM HANDLE



AA614-AA409 MSN
ZINC PLATE+ALUMINIUM HANDLE



T85102-9611 SN/CP
ALUMINIUM HANDLE + IRON PLATE



T85102-9611 SG/GP
ALUMINIUM HANDLE + IRON PLATE



T85102-9611 MAB
ALUMINIUM HANDLE + IRON PLATE



T401-402 MSN
ALUMINIUM HANDLE + IRON PLATE




T618-515 MSN
ALUMINIUM HANDLE + IRON PLATE



T615-417 MSN



T615-417 BLK

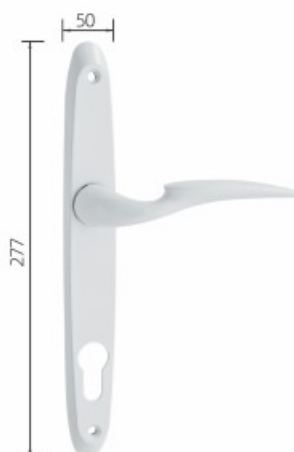

S05-168 W
FULL ZINC AVAILABLE BLACK



S06-AA169 AC
MAB COLOR AVAILABLE



S06-AA169 SN/CP



T58103-LAA23 SN/CP
ALUMINIUM HANDLE + IRON PLATE





R11-AA733 MBN



R11-AA733 DAB



R11-AA733 MSN



RR11-AA734 MSN



R11-AA734 MBN



Z10-AA731 MSN



R11-AA735 DAB



R11-AA735 BLK




Z10-AA731 BLK

DOOR LOCK SERIES



Z10-AA46 MSN

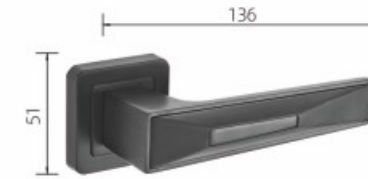

Z10-AA46 BLK



Z10-AA46 MSN/TGP



Z10-AA46 BLK/TGP



Z10-AA46 MAB



Z10-AA45 MSN/MBN



Z10-AA45 TGP/MTGP



Z10-AA45 MSN/CP



R11-AA730 MSN



R11-AA730 BLK



R11-AA730 MSB




R11-AA723 MSN/CP



R11-AA723 MBN/N



R11-AA723 PVD/MSB

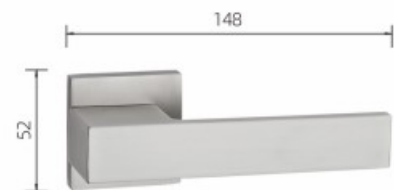

R11-AA702 MSN



R11-AA702 BLK



R11-AA702 MSB



R11-AA708 MSN



R11-AA708 BLK



Z10-AA726 MSN

DOOR LOCK SERIES



R01-AA721 MSN



R01-AA721 BLK



R01-AA721 MSB



R10-AA715 MSN



R10-AA715 BLK



R10-AA715 PVD



Z10-AA718 MSN



Z10-AA718 BLK



Z10-AA718 MSB



Z10-AA718 DAB



R01-AA714 MSN



R01-AA714 PVD



Z10-AA720 MSN



Z10-AA720 BLK



Z10-AA720 MSB



Z10-AA729 MSN



Z10-AA729 BLK



Z10-AA720 MAB



Z10-AA727 MSN



Z10-AA727 BLK



Z10-AA710 MAB



Z10-AA716 MSN



Z10-AA716 BLK

DOOR LOCK SERIES



Z10-AA722 MSN



Z10-AA722 PVD



Z10-AA724 PVD



Z10-AA330 MSN



Z10-AA330 BLK



Z10-AA330 PVD



Z10-AA330 MAB



Z10-AA323 MSN



Z10-AA323 MAB



Z10-AA725 MSN



Z10-AA725 PVD



Z10-AA710 PVD/MAB



Z10-AA320 MSN/CP



Z10-AA320 CP/BLACK



Z10-AA320 SN/RGP



Z07-AA43 SN/CP



Z10-AA44 MSN/HBN



Z10-AA44 SN/RPG



Z10-AA319 MSN/CP



R01-AA318 MSC



Q03-415 MSN



Q03-415 SG/GP



Q03-415 MAB



Q03-415 BLK

DOOR LOCK SERIES



Z01-AA23 SN/CP
MATERIAL:FULL ZINC MATERIAL



Z01-AA23 GP
MATERIAL:FULL ZINC MATERIAL



CK901-AA115 SN



CK901-AA212 SN/CP
MATERIAL:FULL ZINC MATERIAL



CK901-AA212 SG/GP
MATERIAL:FULL ZINC MATERIAL



CK901-Z58 SN
MATERIAL:FULL ZINC MATERIAL



R15-AA315 MCF



CK901-AA118 SN/CP
MATERIAL:FULL ZINC MATERIAL



CK901-AA313 SN/CP
MATERIAL:FULL ZINC MATERIAL



CK901-AA81 SN/CP
MATERIAL:FULL ZINC MATERIAL



CK901-AA80 SN/CP
MATERIAL:FULL ZINC MATERIAL



Z08-AA403 MSN
MATERIAL:ALUMINIUM HANDLE



Z08-AA403 BLK
MATERIAL:ALUMINIUM HANDLE



Z08-411 MAB
MATERIAL:ALUMINIUM HANDLE



Z08-411 BLK
MATERIAL:ALUMINIUM HANDLE



Z08-411 MRGP
MATERIAL:ALUMINIUM HANDLE



Z08-411 MSN
MATERIAL:ALUMINIUM HANDLE



Z08-409 MSN
MATERIAL:ALUMINIUM HANDLE



Z08-409 BLK
MATERIAL:ALUMINIUM HANDLE



Z08-420 BLK
MATERIAL:ALUMINIUM HANDLE



Z08-420 MSN
MATERIAL:ALUMINIUM HANDLE



Z08-416 BLK
MATERIAL:ALUMINIUM HANDLE



Z08-416 MSN
MATERIAL:ALUMINIUM HANDLE

DOOR LOCK SERIES



Z08-420 MSN



Z08-420 MSB



Z08-420 BLK



R08-419 BLK



R08-419 MSN



Z08-417 BLK



Z08-417 MSN



Q03-9216 MSN
MATERIAL: ALUMINIUM HANDLE



Q03-9611 SN/CP
MATERIAL: ALUMINIUM HANDLE



Q03-9313 SN/CP
MATERIAL: ALUMINIUM HANDLE



Q03-414 MSN
MATERIAL:ALUMINIUM HANDLE



Q03-414 MAB
MATERIAL:ALUMINIUM HANDLE



S02-847 SS
MATERIAL: ORIGINAL STAINLESS STEEL
(RALE:304)



S02-809 SS
MATERIAL: ORIGINAL STAINLESS STEEL
(RALE:304)



S07-810 SS
MATERIAL: ORIGINAL STAINLESS STEEL
(RALE:304)



S02-103 SS
MATERIAL: ORIGINAL STAINLESS STEEL
(RALE:304)



S02-101 SS
MATERIAL: ORIGINAL STAINLESS STEEL
(RALE:304)



S03-102 SS
MATERIAL: ORIGINAL STAINLESS STEEL
(RALE:304)



C03-9103 BLK
MATERIAL: ORIGINAL STAINLESS STEEL



C03-9106 MSB
MATERIAL: ORIGINAL STAINLESS STEEL



S02-815 BLK
MATERIAL: ORIGINAL STAINLESS STEEL



C03-9106 BLK
MATERIAL: ORIGINAL STAINLESS STEEL



C03-9106 PVD
MATERIAL: ORIGINAL STAINLESS STEEL

DOOR LOCK SERIES



C03-9106 SS
MATERIAL : SS RATE 201



C03-9102 SS
MATERIAL : SS RATE 201



C03-9103 SS
MATERIAL : SS RATE 201



C03-9105 SS
MATERIAL : SS RATE 201



C03-9109 SS
MATERIAL : SS RATE 201



C03-9110 SS
MATERIAL : SS RATE 201



C03-958 SS (HOLLOW)
MATERIAL : SS RATE 201



C03-958 PVD
MATERIAL: ORIGINAL STAINLESS STEEL



C03-958 BLK
MATERIAL: ORIGINAL STAINLESS STEEL



C03-9111 MSB
MATERIAL: ORIGINAL STAINLESS STEEL



C03-9111 PVD
MATERIAL: ORIGINAL STAINLESS STEEL



C03-9111 BLK
MATERIAL: ORIGINAL STAINLESS STEEL



Electric lock H508



Magnetic lock M280



Electric Glass Door lock



Electric Strike Lock



Z Holder



U Holder



Access Control K05



Access Control S601 EM
(water proof)



Power Supply P06



SS PUSH BUTTOM



Remove Control Y09



Door Bell

Internal Structure and Characteristics

1. Quality Test: Successfully pass 200,000 open/close test (TESE IN OUR FACTORY)
2. Warranty : 2 Years
3. Card Type: Temic T5557



Hotel Lock Management System

Hotel Intelligent Door Lock System is a set of software and hardware integrated system, which is composed of the following parts :



Software System

Support Windows 3.1 and above systems.

Management software

Manage the system, including setting the door lock function, limiting the permissions of the cardholder, reading the unlocking record, adjusting the clock inside the lock etc.

Card Encoder

Connect with the computer's USB interface to operate the card.

Smart Card

Devided into normal card and management card.

Normal Card Functions


Room card, cleaning card, floor card, building card, master card.

Management Card Functions

Room No. setting card, date/time setting card, record card, area card.

Card Type

Temic T5557 Card / Mifare-1 Card

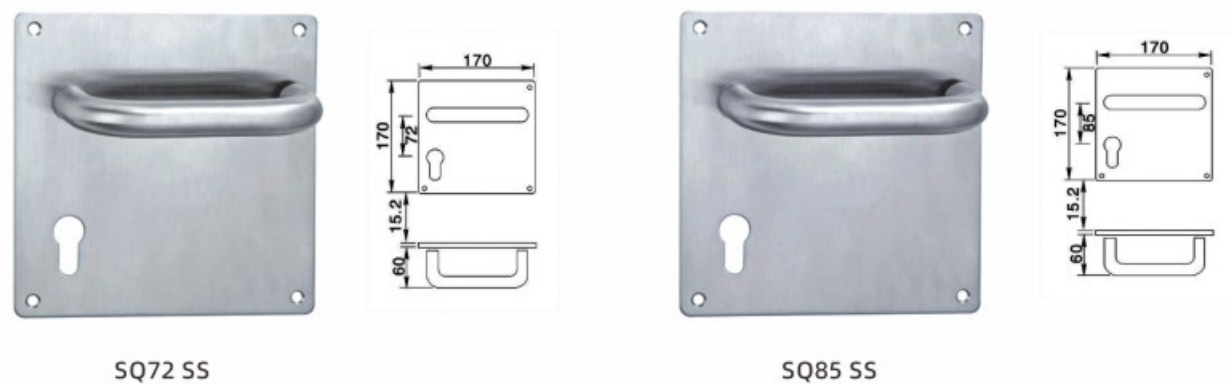


PULL HANDLE SERIES

(SUITABLE FOR WOODEN,STEEL,ALUMINIUM, GLASS DOOR)



SIZE (MM)\MODEL NO	SQ300	SQ400	SQ500	SQ600	SQ800	SQ1000	SQ1200	SQ1500	SQ1800
A (FULL LONG)	338	438	538	638	838	1038	1238	1538	1838
B (HOLE TO HOLE)	300	400	500	600	800	1000	1200	1500	1800
C	25	25	25	25	25	25	25	25	25
D	38	38	38	38	38	38	38	38	38
COLOR	SS/BLK	SS/BLK /MGP	SS/BLK /MGP	SS/BLK /MGP/PVD	SS/BLK /MGP	SS/BLK /MPG/PVD	SS/BLK	SS/BLK /PVD	SS/BLK

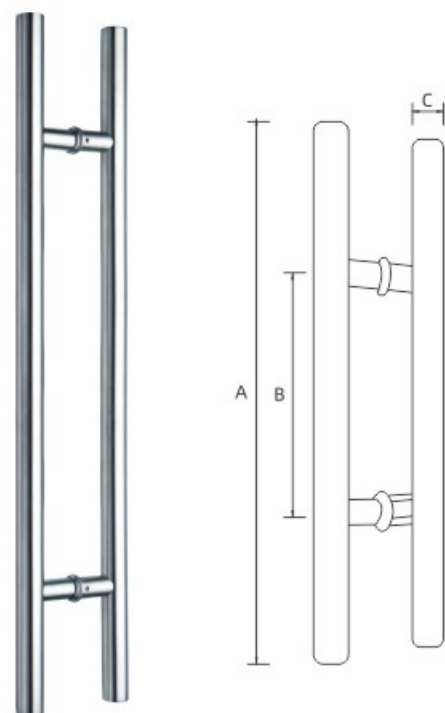


SIZE	450*32	600*32	1000*32	1200*32	1500*32
A	450	600	1000	1200	1500
B	300	400	800	1000	1200
C	32	32	32	32	32
COLOR	SS/BLK /CP	SS/BLK	SS/BLK	SS/BLK /PVD	SS/BLK

H TYPE ROUND HANDLE


SC-TYPE PULL HANDLE

(SUITABLE FOR WOODEN, STEEL, ALUMINIUM, GLASS DOOR)

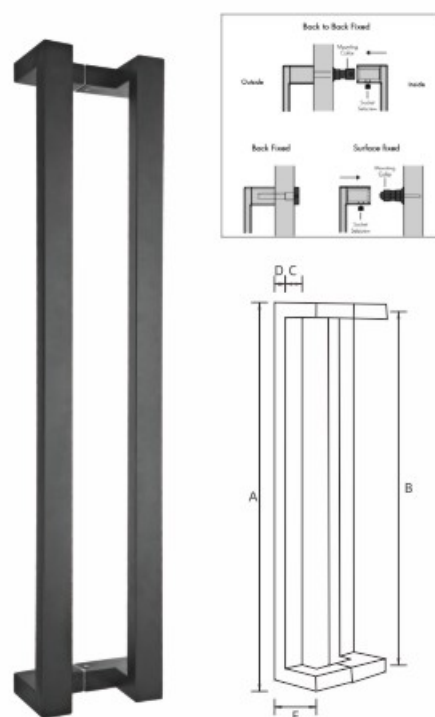


SIZE	SC400	SC600	SC1000	SC1200
A FULL LONG	435	635	1035	1235
B HOLE TO HOLE	400	600	1000	1000
C	38	38	38	38
D	25	25	25	25
E	80	80	80	80
COLOR	BLK	SS/BLK /MGP/PVD	BLK	SS/BLK /MGP/PVD

PULL HANDLE SERIES

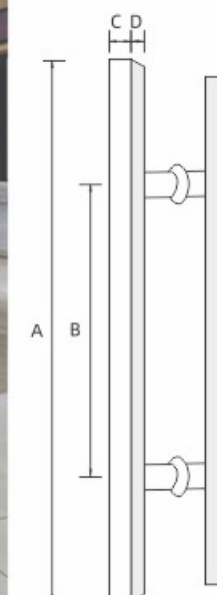

CQ600

SIZE	CQ400	CQ600	CQ800	CQ1000	CQ1500
A	400	600	800	1000	1500
B	300	400	600	800	1200
C	40	40	40	40	40
D	10	10	10	10	10
COLOR	SS/BLK/MGP	SS/BLK/CP /MGP/PVD	SS/BLK /MGP/PVD	SS/BLK/CP /MGP/PVD	SS/BLK

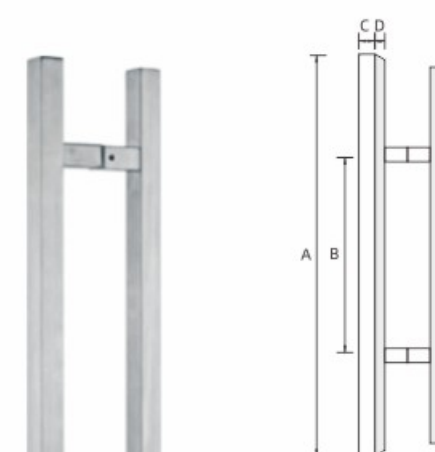


SIZE	PH450	PH600	PH1200
A	450	600	1200
B	300	400	1000
C	25	25	25
D	25	25	25
COLOR	SS/BLK	SS/BLK	SS/BLK

PH450



BD300*180



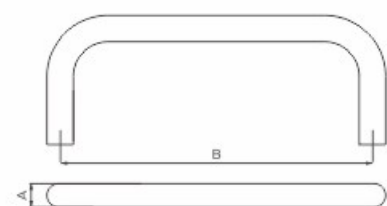


DP302-219*19

FINISH : SS/BLACK
C=219
B=200
A=19
MATERIAL : Stainless Steel





DP303-300*32

FINISH : CP/OR/SS
MATERIAL : Stainless Steel




DP301

MATERIAL : Stainless Steel

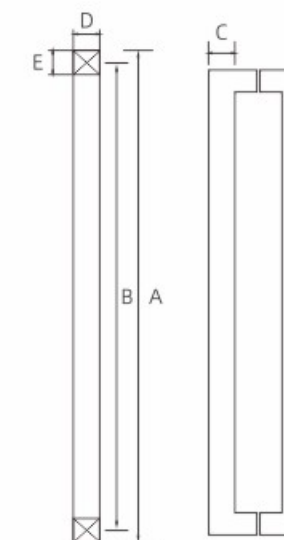

SIZE	DP301-400	DP301-600	DP301-800	DP301-1000	DP301-1200
A	440	640	840	1040	1240
B	400	600	800	1000	1200
C	20	20	20	20	20
D	20	20	20	20	20
E	40	40	40	40	40
COLOR	BLK	BLK	BLK	BLK	BLK


(SUITABLE FOR WOODEN,STEEL,ALUMINIUM, GLASS DOOR)

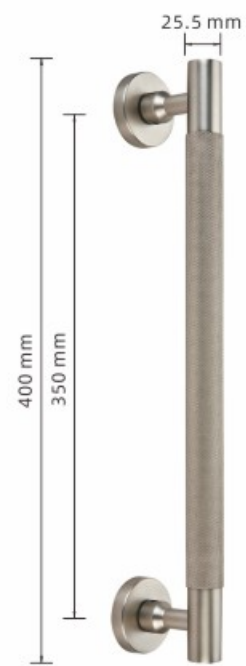

SY340 SN



SY340 BLK

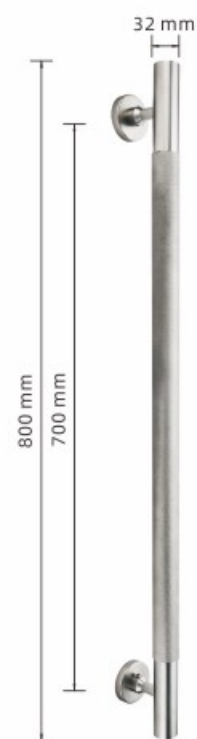


SY8060 MSN



SY8060 MAB



SY8060 BLK

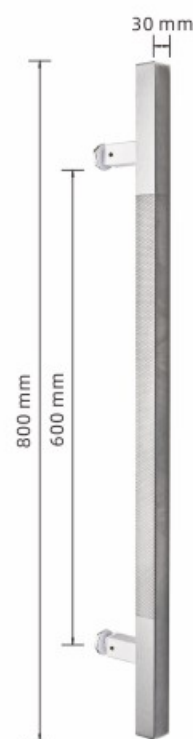

SY800 MSN



SY800 BLK

PULL HANDLE SERIES



K008 SN



K008 AB




K2106 MSN



K008 GP



K008 AC



K2106 BLK



SY271 MAB



SY271 MAC




SY271 MAE



SY271 SN




SY271 GP

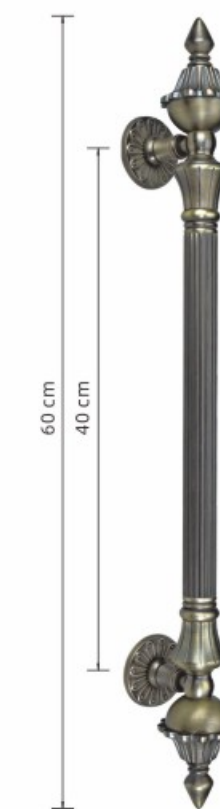

SY001 MAB
AVAILABLE : PVD

MODEL NO :8545 SS
AVAILABLE COLOR (GP,MAB,MAC,BLACK,MSB)

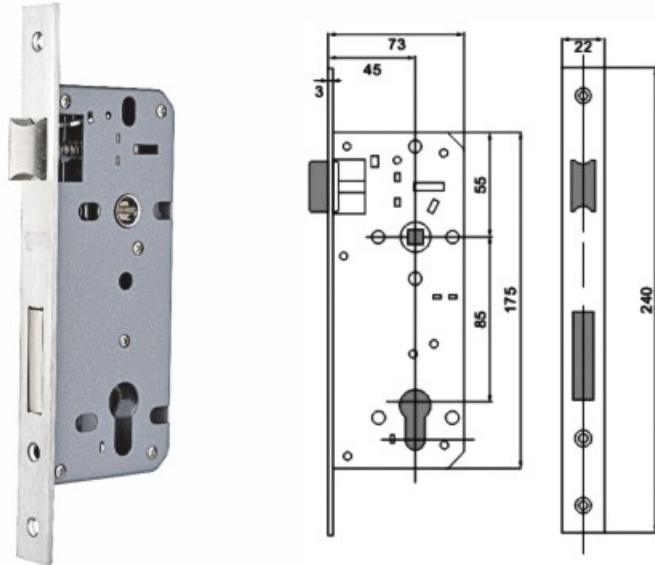

Features
For Wooden & Metal doors
For single-leaf doors
Suitable for external fire and smoke doors
Prepared for Profile Cylinders
With key action
Stainless steel Forend
Brass latch bolt
Deadbolt 2-turns

Technical Data
Follower : 8mm
Distance : 85mm
Backset : 40,45,50,55,60MM

Forend
Type : Square Head
Thickness : 3mm
Width : 22mm

Accessories
Striking plate
Lock and Striking plate fixing screws

Quality test
Pass 200,000 open-lock test
5 YEARS MACHANICAL GUARANTEE

MODEL NO : MGT8550
AVAILABLE COLOR (GP,SN,BLACK)



Features
For Wooden & Metal doors
For single-leaf doors
Suitable for external fire and smoke doors
Prepared for Profile Cylinders
With key action

Technical Data
Follower : 8mm
Distance : 85mm
Backset : 50MM


Forend
Type : Circular Head
Thickness : 3mm
Width : 18mm

Accessories
Magnetic part
Lock fixing screws

Quality test
Pass 100,000 open-lock test

MAGNETIC LOCK BODY

MODLE 7255 SS
AVAILBLE COLOR (BLACK)

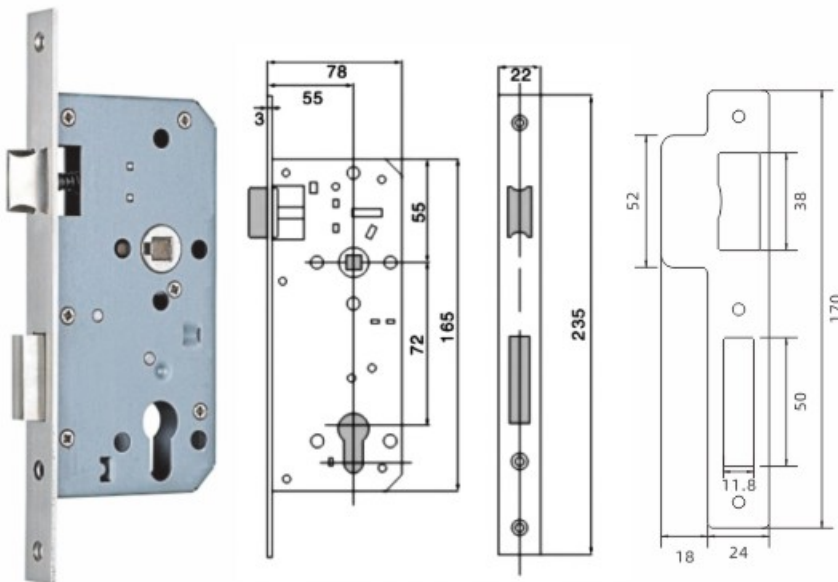

Features
For Wooden & Metal doors
For single-leaf doors
Suitable for external fire and smoke doors
Prepared for Profile Cylinders
With key action
Stainless steel Forend
Brass latch bolt
Deadbolt 2-turns

Technical Data
Follower : 8mm
Distance : 72mm
Backset : 55 mm and 60mm

Forend
Type : Square Head
Thickness : 3mm
Width : 22mm

Accessories
Striking plate
Lock and Striking plate fixing screws

Quality test
Pass 200,000 open-lock test
5 YEARS MACHANICAL GUARANTEE

MODLE 8518 SS
AVAILBLE COLOR (GP,SN,BLACK)



Features
For Wooden & Metal doors
For single-leaf or double door
Suitable for external fire and smoke doors
Prepared for Profile Cylinders
With key action
Stainless steel Forend
Deadbolt 2-turns

Technical Data
Follower : 8mm
Distance : 85mm
Backset : 45 mm

Forend
Type : Square Head
Thickness : 3mm
Width : 22mm

Accessories
Striking plate
Lock and Striking plate fixing screws

Quality test
Pass 200,000 open-lock test
5 YEARS MACHANICAL GUARANTEE



8545 SS






7210-55D SS (BLACK)



HK8545



HK50 SS

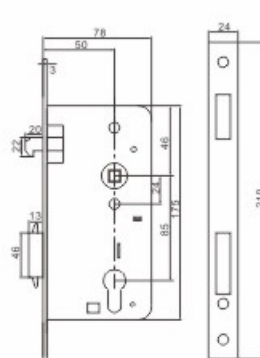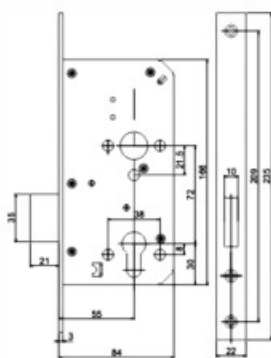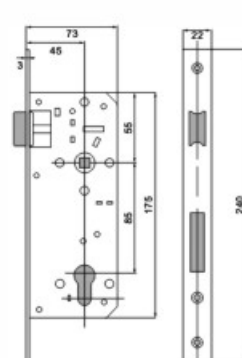

8520



8525








8530



8530R



8535

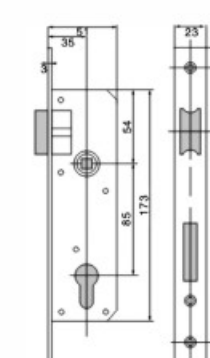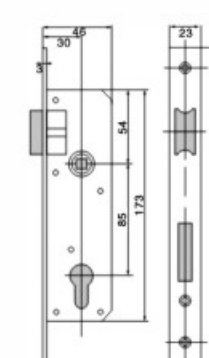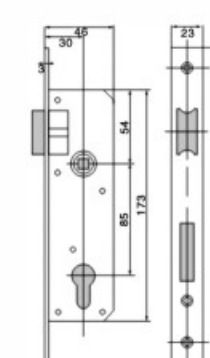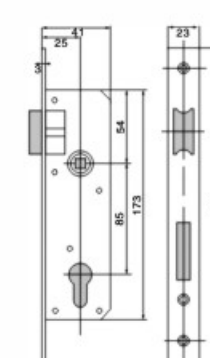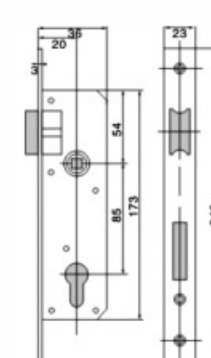

8560 SS







7255 SS



8550 SS



8555 SS



8540



F55 SS








7855



D58




8517-4R CP





3D HD150MM

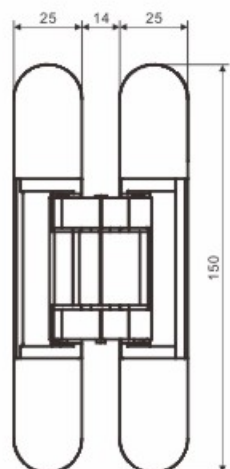

FEATURES:

For wooden doors
For flush doors
Concealed installation
Adjustable after installed
Adjustments
vertical ± 3 mm, horizontal $+2$ mm, -2 mm and depth ± 1 mm
Opening angle: 180°

TECHNICAL DATA	Max door weight with 2 hinges	40 kg
	Min door thickness	35 mm
	Max door width	850 mm
	Slim design for thin door	21.5 mm
MATERIALS	Zinc Alloy, Alum	
FINISHES	SN, BLACK, MAB, GP	
INSTALLATION	Wood tapping screws, Iron screws optional	


Note:

Finger protection due to small gap between door and frame.


Application:

Completely concealed for flush door with wood steel or aluminum frame.

CUT OUT:

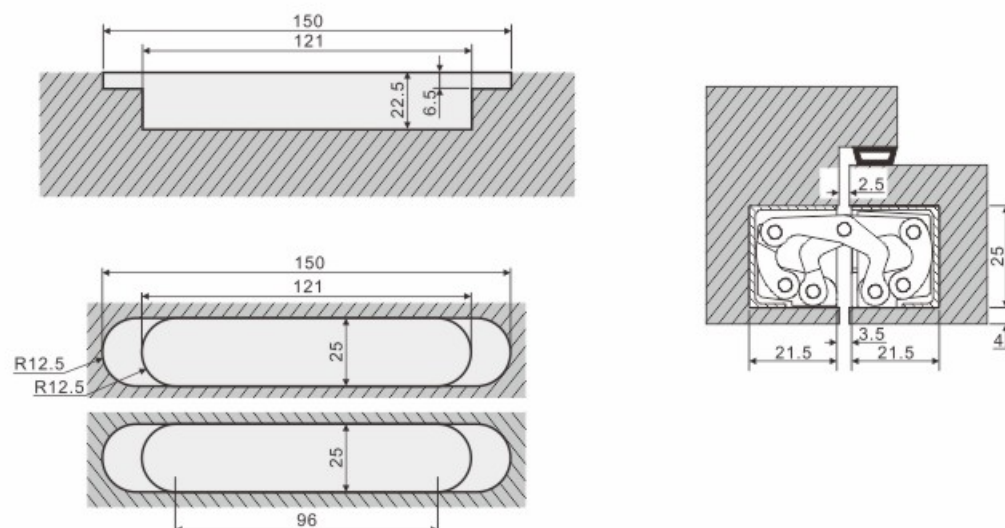

3D HD177MM

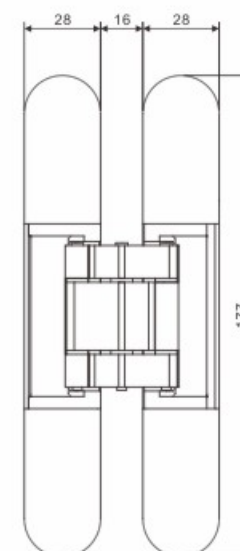

FEATURES:

For wooden doors
For flush doors
Concealed installation
Adjustable after installed
Adjustments
vertical ± 3 mm, horizontal $+2$ mm, -2 mm and depth ± 1 mm
Opening angle: 180°

TECHNICAL DATA	Max door weight with 2 hinges	80 kg
	Min door thickness	40 mm
	Max door width	1000 mm
	Slim design for thin door	24.5 mm
MATERIALS	Zinc Alloy, Alum	
FINISHES	SN, BLACK, MAB, GP	
INSTALLATION	Wood tapping screws, Iron screws optional	


Note:


Finger protection due to small gap between door and frame.

Application:


Completely concealed for flush door with wood steel or aluminum frame.

CUT OUT:

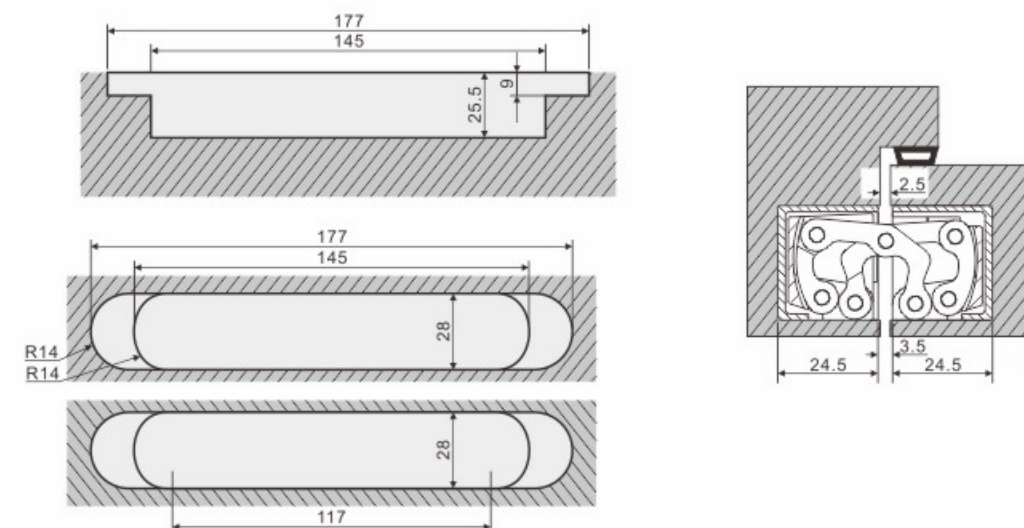

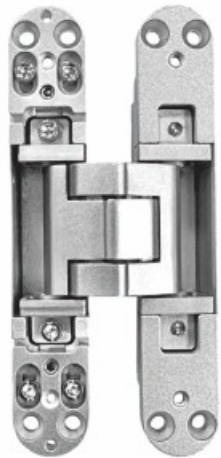

3D HD160MM

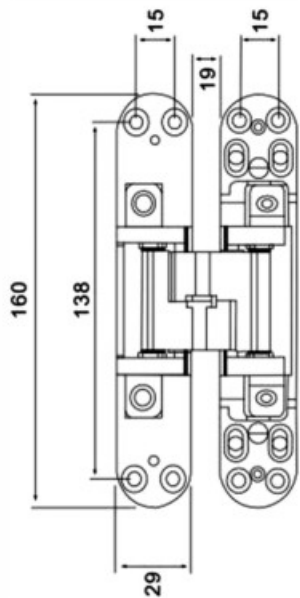

FEATURES:

For wooden doors
For flush doors
Concealed installation
Adjustable after installed
Adjustments
vertical ± 3 mm , horizontal $+2$ mm , -2 mm and depth ± 1 mm
Opening angle: 180°

TECHNICAL DATA	Max door weight with 2 hinges	60 kg
	Min door thickness	40 mm
	Max door width	850 mm
	Slim design for thin door	30 mm
MATERIALS	Zinc Alloy, Alum	
FINISHES	SN , BLACK ,MAB, GP	
INSTALLATION	Wood tapping screws, Iron screws optional	



Note:

Finger protection due to small gap between door and frame.


Application:

Completely concealed for flush door with wood steel or aluminum frame .

CUT OUT:

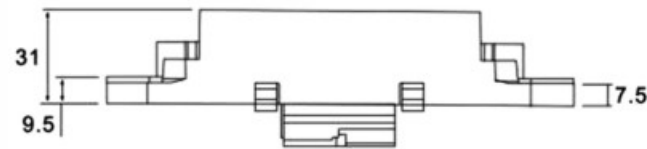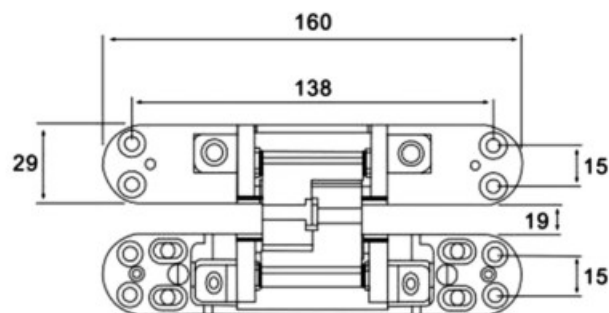

3D HD140 MM

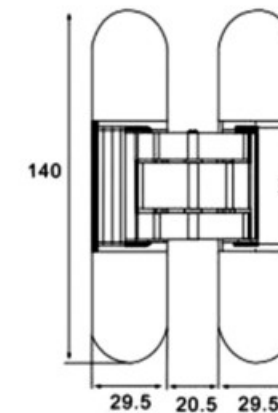

FEATURES:

For wooden doors
For flush doors
Concealed installation
Adjustable after installed
Adjustments
vertical ± 3 mm , horizontal $+2$ mm , -2 mm and depth ± 1 mm
Opening angle: 180°

TECHNICAL DATA	Max door weight with 2 hinges	60 kg
	Min door thickness	30 mm
	Max door width	850 mm
	Slim design for thin door	40 mm
MATERIALS	Zinc Alloy, Alum	
FINISHES	SN ,BLACK ,GP	
INSTALLATION	Wood tapping screws, Iron screws optional	



Note:

Finger protection due to small gap between door and frame.

Application:

Completely concealed for flush door with wood steel or aluminum frame .



CUT OUT:

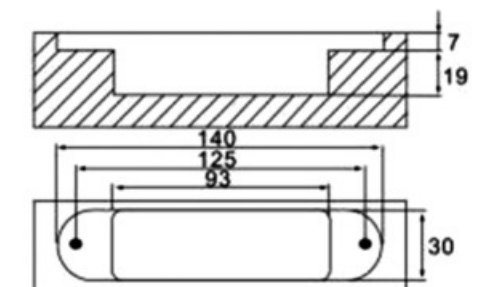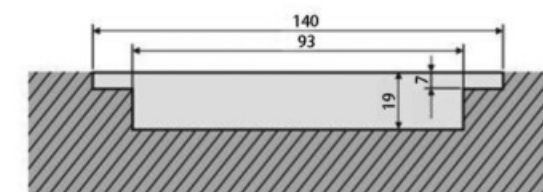



Dimension (mm)	Zinc Alloy Shell Stainless Steel Core Concealed Hinge Parameter					
	HD28X118	HD25X118	HD19X95	HD16X70	HD13X60	HD13X45
	28X118	25X118	19X95	16X70	13X60	13X45
A	28	25	19	16	13	13
B	117.5	117.5	95	70	60	45
C	22	18	13	11	9	9
D	61.5	64	51.2	34	30	19
E	1.4	1.6	1.2	0.8	0.8	0.8
F	41	36	27	22.5	18	18
G	9.5	11	9	7	6	5
H	outer hole 93	90	73	51	47	30.5
	outer hole 87					
Door thickness	40mm	35mm	30mm	25mm	20mm	20mm
Each weight g/pc	785g	650g	310g	160g	85g	55g
Bearing weight kg/pc	40kg	30kg	25kg	15kg	10kg	5kg

Installation: 3pcs for a door, it depends on door thick, weight, and actual situation.

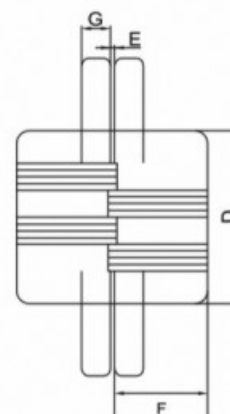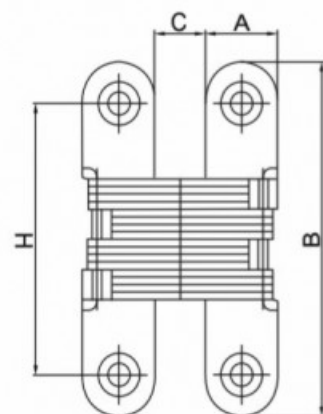

CLS4*3*3 BLK




CLS4*3*3 SS
AVAILABLE GP COLOR



CLS4*2.5 BT BLK



CLS4*2.5 BT SS
AVAILABLE GP COLOR

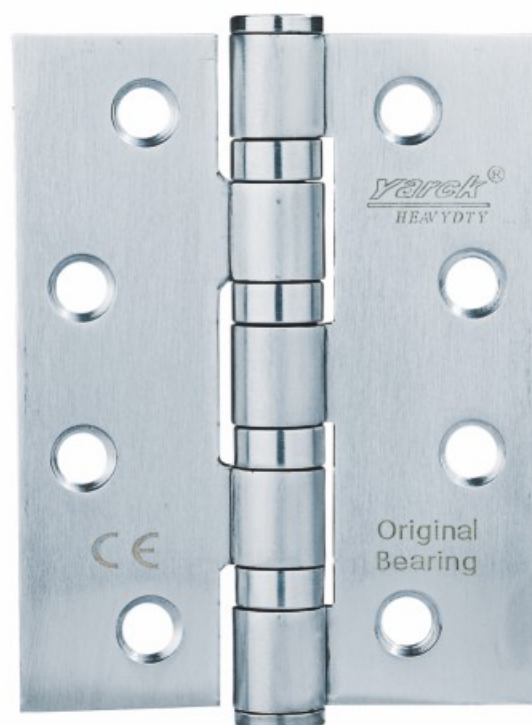

4*3*3 SS



4*3*3 MAB



4*3*3 BLACK



4*3*3 MATTE GP

SPECIFICATION:

NAME	FLAT OPEN DOOR HINGES
SIZE:	4*3*3 SS (AXE 13.5MM)
MATERIAL:	STAINLESS STEEL 304 OR 201
MIN DOOR THICKNESS:	35MM
MAX DOOR WEIGHT:	100 KG/3 PCS
SUITABLE FOR:	ALL KINDS WOODEN GATE DOOR, WOODEN ROOM DOOR
QUALITY TEST:	FIRE-RATED: 90 MINUTES CE MARKING ORIGINAL BEARING (SWITCHING FLEXIBILITY, NO NOISE, LONG LIFE) SUCCESSFULLY PASS 200,000 OPEN/CLOSE TEST
GUARRANTY:	5 YEAR MACHANICAL GUARANTEE

DOOR HINGES SERIES



4*2.5 BT BLACK



4*2.5 BT SS
MAT GOLDEN AVAILABLE




6*3.5*3 SS



5*3*3 SS




5*3.5*3 SS



4*4*3 SS



4*3.5*3 SS



3*2.5 SS





60MM 2S (30MM+30MM)
COLOR : SN GP



60MM 1S (30MM+30MM)
COLOR : SN



60MM ZBK (30MM+30MM)
COLOR : SN



UNION CYLINDER



70MM 2S (35MM+35MM)
COLOR : BLK



70MM 2S (35MM+35MM)
COLOR : SN AB AC GP



70MM 1S (35MM+35MM)
COLOR : SN (GPAB,AC AVAILABLE)



70MM 1S (35MM+35MM)
COLOR : BLK (GPAB,AC AVAILABLE)



70MM ZBK (35MM+35MM)
COLOR : SN (GPAB,AC AVAILABLE)



E70MM 1S (35MM+35MM)
COLOR : SN



E70MM 2S (35MM+35MM)
COLOR : SN (GPAB,AC AVAILABLE)



80MM 2S (40MM+40MM)
COLOR : SN GP AB BLK



80MM 1S (40MM+40MM)
90MM 1S (45MM+45MM)
100MM 1S (50MM+50MM)



B70MM 2S (35MM+35MM)
COLOR : SN (GP AVAILABLE)



B45 MM ZBK
COLOR : SN



B45MM
COLOR : SN

DOOR CYLINDER SERIES



B90MM 2S (45MM+45MM)
COLOR : SN



B100MM 2S (50MM+50MM)
COLOR : SN



B110MM 2S (55MM+55MM)
COLOR : SN (GP AVAILABLE)



B120MM (60MM+60MM)
COLOR : SN




B130MM (65MM+65MM)
COLOR : SN




B140MM (70MM+70MM)
COLOR : SN



B70MM -UN (30MM+40MM)
COLOR : SN

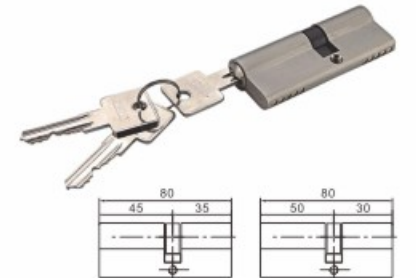


B80MM-UN(35MM+45MM)
B80MM-UN(30MM+50MM)
COLOR : SN

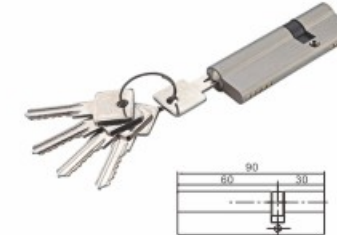


B90MM-UN(30MM+60MM)
COLOR : SN



B90MM-UN(35MM+55MM)
COLOR : SN

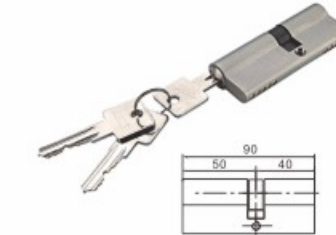

B90MM-UN(40MM+50MM)
COLOR : SN

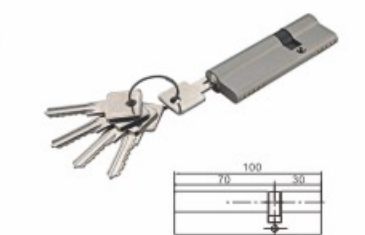

B100MM-UN(30MM+70MM)
COLOR : SN



B80MM 1S -UN(50MM+30MM)
COLOR : SN




B90MM 1S -UN(60MM+30MM)
COLOR : SN



B100MM 1S -UN(70MM+30MM)
COLOR : SN



B110MM-UN (70MM +40MM)
B110MM-UN (60MM +50MM)
COLOR : SN

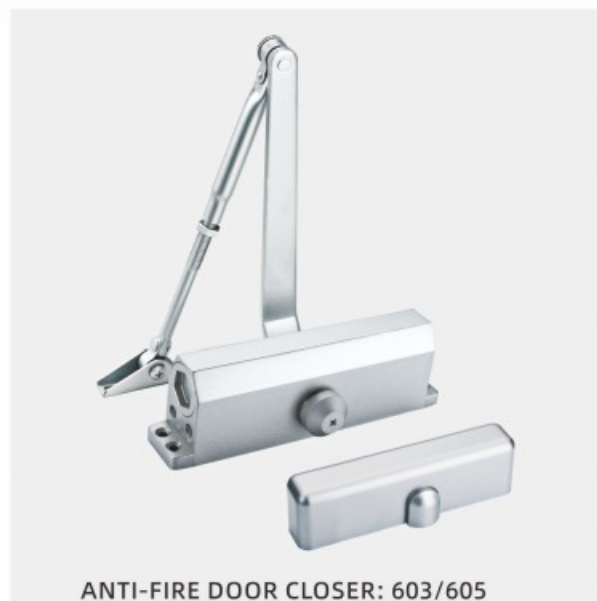

ANTI-FIRE DOOR CLOSER: 603/605

Material:

Aluminum Alloy Pressure Die-Cast

Application:

603 is an overhead door closer suitable for standard to medium weight doors for both interior or exterior application.

Standards And Certification:

Certificate Of Constancy Of Performance
0359-CPR-00071-02



All test performed independently and certified by intertek Testing and Certification Ltd, at UK


CE Marking: CE Declaration of Conformity available on request.



Fire Safety: Successfully test on fire door assemblies according to EN 1154:1996/A1:2002/AC:2006

EN 1154:1996 / A1:2002 / AC:2006

product classification					
3	8	3	1 ^c	1	1

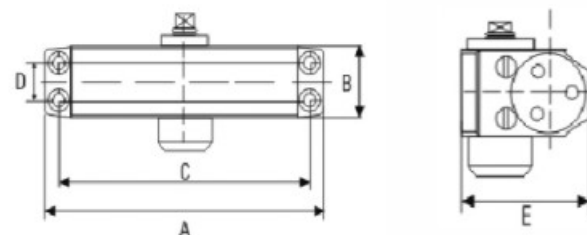

	Dimension (mm)					Door width (mm)	Sult For Door Weight (KG)
	A	B	C	D	E		
604	223	206	19	44.5	72.5	1100	60-85
605	240	230	19	44.5	72.5	1250	80-120

Specifications and Features

Slim Desind

603 has a compact size with minimized projection allowing installation to door's adjacent return wall.

Full Rack And Pinion Construction

Heat-treated rack and pinion immersed in high grade oil for smooth action and minimum wear and tear

Selectable Power Size by Mounting position

MAX DOOR WIDTH (MM)	1050
MAX DOOR WEIGHT (MM)	70
MAX OPENING ANGLE	180°


Non Handed

603 can be universally fitted on both left and right handed swing doors

Flexible Mounting Position

603 can be installed on both pull and push side of door and can be fitted on both door and frame

Adjustable Latching and Closing Speed

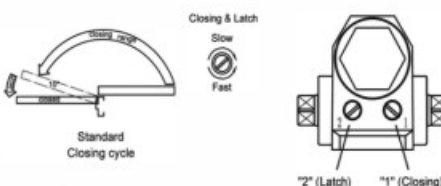

Finishes


in stock, available silver (sn), white, ab
Finish: silver, golden, white, black

CLOSER AND PUSH BAR SERIES

MODEL NO : CCL103



- Concealed Overhead Closer, "invisible" door closer
- 103 Type meet UL standard, with CCCF certified
- Precise Aluminum Body with Needle Bearing
- Adjustable Closing & Latching Speed
- Closer body 32mm Thickness. Non Handed Installation
- Slide Tracking arm with hold-open function

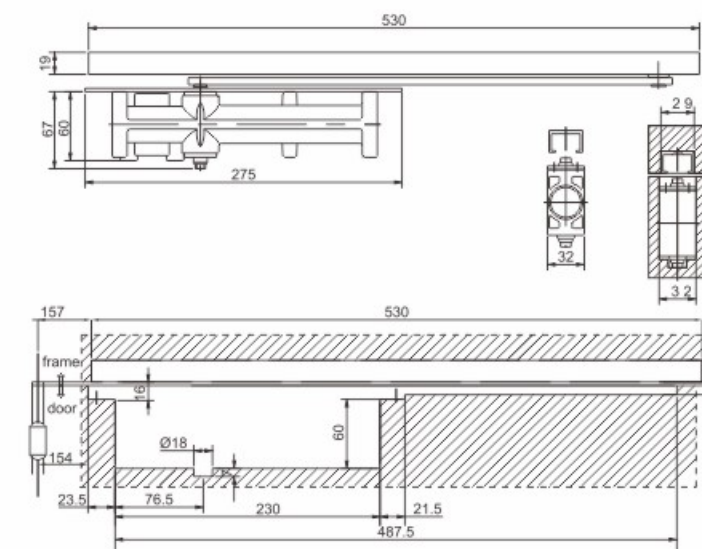

103 104 Dimensioned Drawing



	Max. Door width (mm)	Door weight (kg)	Material of Body
103	950	40-65	Die Casting Aluminum

DATA AND FEATURES

Certification	UL AND CCCF Certified
Spring Power	EN 3-5
Durability	100,000 Cycles above
Speed values	Adjustable closing and latching speed
Hold-open	Yes
Angle of Opening	120°
Bearing	Full complement bearings for long durability
Application	Suitable for Interior wood ,aluminium and frames
Finish	SILVER AND BLACK
Warranty	2 years
Door thickness	Wooden door :45mm Metal door: 40 mm

Note


Installation as per template & installation instruction

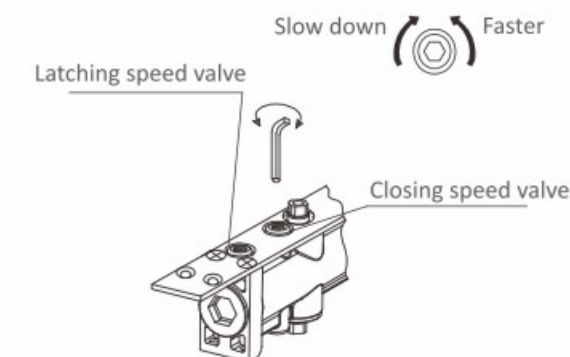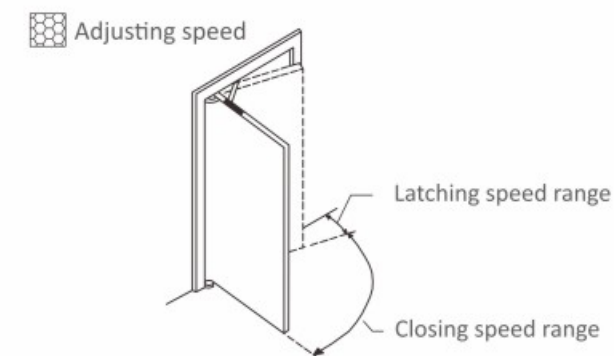

MODEL NO : CCL1035



- Concealed Overhead Closer, "invisible" door closer
- Adjustable Closing & Latching Speed
- Power Adjustable #3 to #5 by Spring
- Thickness 37 mm
- Self-regulating Back Check
- Angle of opening : 120°

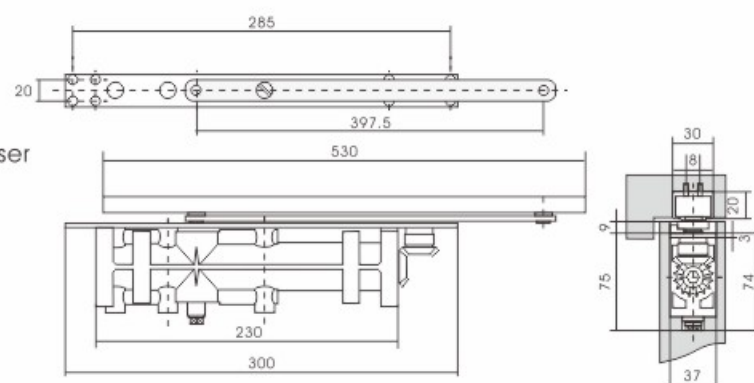

	Max.Door width (mm)	Door weight (kg)	Material of Body
1035	1200	40-100	Die Casting Aluminum



DATA AND FEATURES

Certification	UL AND CCCF Certified
Spring Power	EN 3-5
Durability	100,000 Cycles above
Speed values	Adjustable closing and latching speed
Hold-open	Yes
Angle of Opening	120°
Bearing	Full complement bearings for long durability
Application	Suitable for Interior wood ,aluminium and frames
Finish	SILVER AND BLACK
Warranty	2 years
Door thickness	Wooden door :45mm Metal door: 40 mm

Note


Installation as per template & installation instruction

Adjusting speed

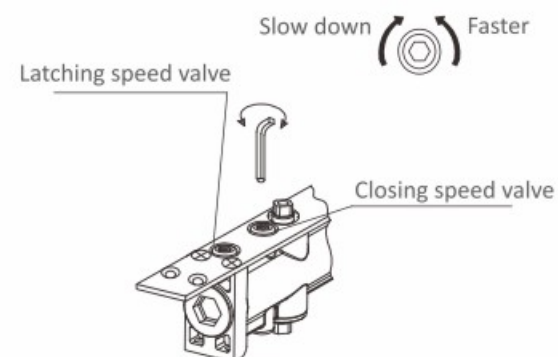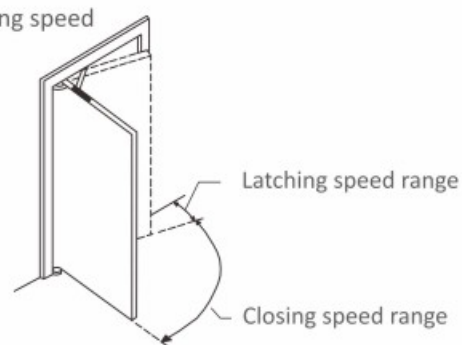

CLOSER AND PUSH BAR SERIES

PANIC BAR P500

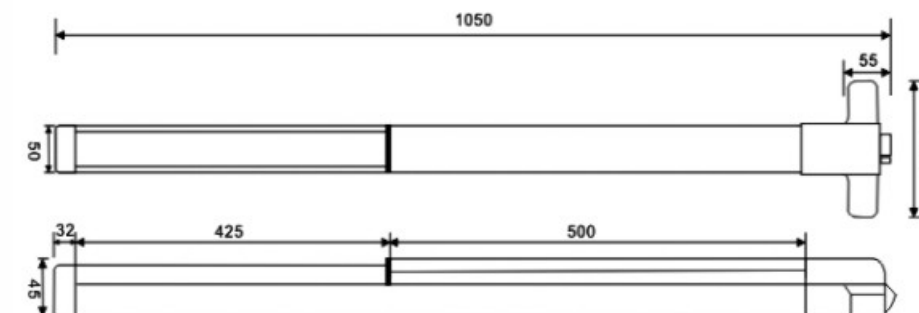

PANIC HANDLE P16




PANIC BAR P500

Type: American Style, Push bar, Rim Type
Material: Zinc alloy
Length: 1050mm Standard,could be customized
Non-handed, for left hand or right hand doors
Chiese fire test 90 minutes (test in our factory)

CLASSIFICATION:

Panic bar p500: stell, painted,
Half length push pad





S-LATCH 100MM SS /BLK



RIM LOCK 116



7058 SN



T1



225 W



224 W



SD700 SN (BLACK)



CLK2201






MICO 1862



1863



L003




LH7059



Ch7057




7060 CONCEAL CHAIN
COLOR : SN/BLK/GP

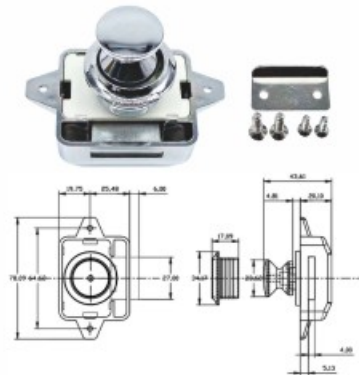


RV PUSH BUTTON
DRAWER LOCK

SMALL HARDWARE SERIES

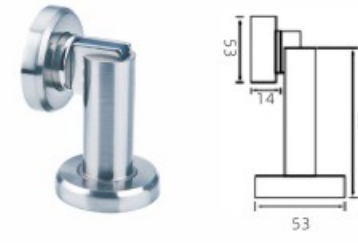


M118 SS

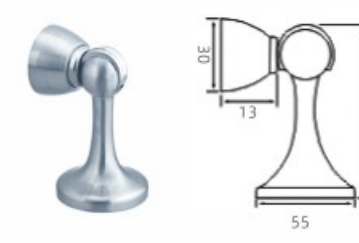

M113 SS




W012



M008




W010 SS BLK

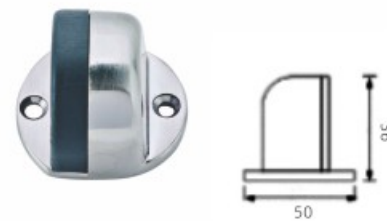


TCF66



DS002

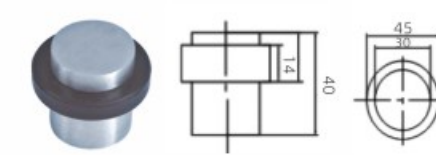


SP115 SS

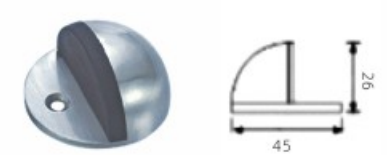


HSP114
SN GP AB AC BLK



D51

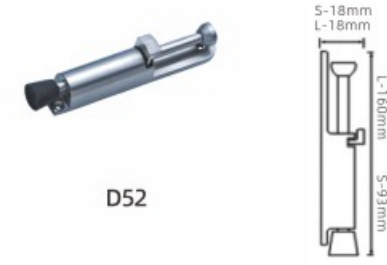


D52

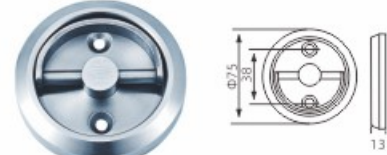

CP11 SS/BLK




CB2310 [BEND]
CB2311 [STRAIGHT]

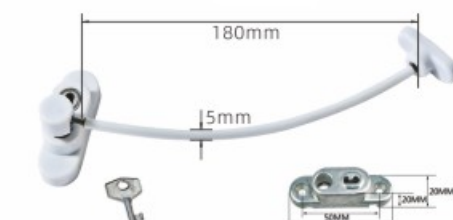


2399B
baby safe window lock




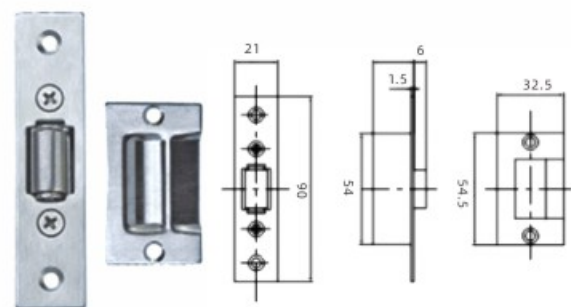

RI7050

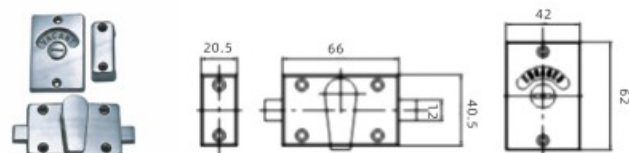

D3707

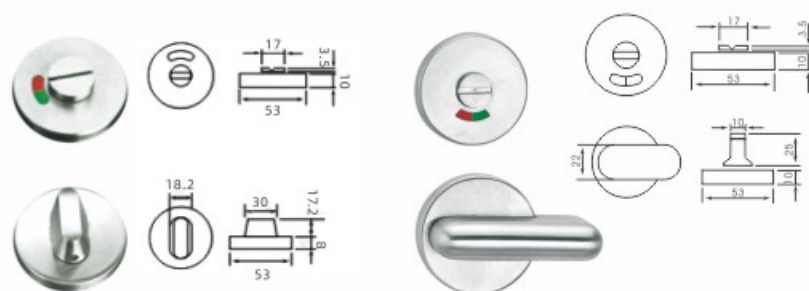

BK1BK3 SS
AVAILABLE : BLACK

BK1BK5 SS
AVAILABLE : BLACK



HASP



LATCH BOLT



TOWER BOLT



AUTO BOLT



FVA34-8




13822




103-16,20,25,30



B205
COLOER : SN GP BLK



B206 SN



SMALL HARDWARE SERIES



E02 SS



E04 SS



E02-M SS



E04-M SS



R901 SN



R901 MAB



R901 MAE



R901 GP



R901 BLK




R11-SQ BLK



R11-SQ MSN



CYLINDER PULL
A01



SC A02



DSC606 BLK



DSC707 BLK



